SAUER DANFOSS

PVG 120
Proportional Valves

Technical Information

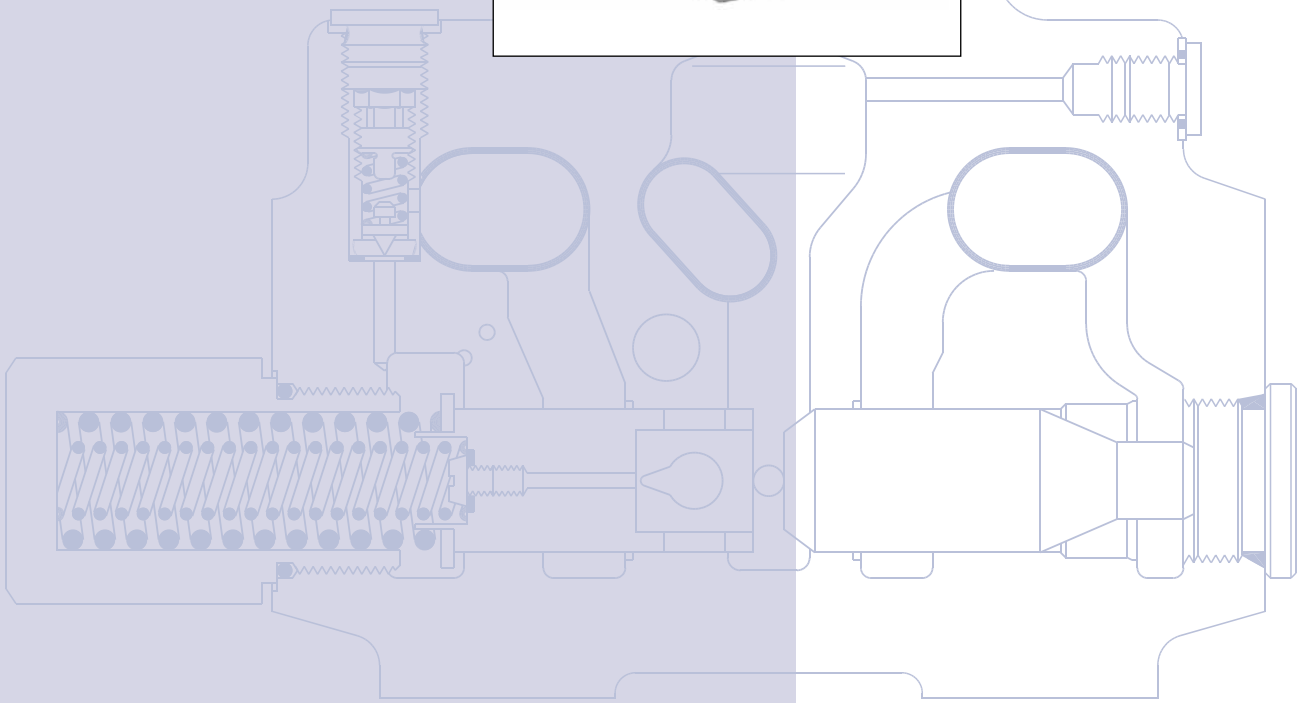

PVG 120 Proportional Valve
Technical Information
Revision History, Contents

Table of Revisions

Date	Page	Changed	Rev
Apr 2010	Various	Layout, drawings and others	HA
Sep 2010	29, 44	Drawing, new back cover	HB
Sep 2011	All	TOC moved all pages by one, Safety section, SD layout.	IA

Contents

General Information

Valve system 4
General characteristics 4
Pump side module – PVP 4
Basic module – PVB 4
Actuation modules 4
Remote controls units 5
Electronic accessories 5

Function

PVG 120 with Open Centre PVP 6
PVG 120 with Closed Centre PVP 6
PVG 120 Sectional Drawing 7

Hydraulic Systems

Examples 8

Technical Data

PVG 120 Valve Group 10
Mechanical Actuation PVM 10
Hydraulic Actuation PVH 10
PVE, Electrical Actuation 11
PVEO 11
PVEH 11
PVPE, Electrical Relief Valve, Normally Open 12

Electrical Actuation

PVEO, ON-OFF 13
PVEH, Proportional High 13
PVEH, LVDT-Transducer 14
PVEH, Pulse Width Modulation 14
PVEH, Fault Monitoring 14
Fault Monitoring Specification 15
PVEH, Connection to Fault Monitoring Output 16

© 2011 Sauer-Danfoss. All rights reserved.

Sauer-Danfoss accepts no responsibility for possible errors in catalogs, brochures and other printed material. Sauer -Danfoss reserves the right to alter its products without prior notice. This also applies to products already ordered provided that such alterations can be made without affecting agreed specifications. All trademarks in this material are properties of their respective owners. Sauer-Danfoss, the Sauer-Danfoss logotype, the Sauer-Danfoss S-icon, PLUS+1™, What really matters is inside® and Know-How in Motion™ are trademarks of the Sauer-Danfoss Group.

Frontpage: F301 112, F300 001, F300 009, F300 011, Drawing 155B569.eps

SAUER DANFOSS

PVG 120 Proportional Valve
Technical Information
Contents

Modules and Code Numbers

PVP and PVPV, Pump Side Modules 17
PVP, Accessories for Open Centre Pump Side Modules 18
PVB, Basic Modules 19
PVB, Accessories for Basic Modules 20
PVLP, Shock and Suction Valves for A and B Port Connections 21
PVLA, Suction Valve 21
PVBS, Main Spools 22
PVM, Mechanical Actuation 23
PVMD, Cover for Mechanical Actuation 23
PVH, Hydraulic Actuation 23
PVE, Electrical Actuation 23
PVT, Tank Side Modul 24
PVAS, Assembly Kit 24
Modules for Oil Flow Exceeding 180 l/min [47.6 US gal/min] 25
- Pump with fixed displacement 25
- Pump with variable displacement 25

Technical Characteristics

General 26
PVP, Pump Side Module 26
PVB, Basic Module 27
PVLP, Shock Valve (Pressure Relief Valve in PVLP) 29
PVLP/PVLA, Suction Function 29

Dimensions

Valve Dimensions 30
General Dimensions 31

Lever Positions

PVM, Lever Positions 32

Safety in Application

Building in Safety 33
- FMEA (Failure Mode and Effect Analysis) IEC EN 61508 33
- Hazard and Risk Analysis ISO 12100-1 / 14121 33

Control System Example 34
- PVG32 – Mainly used in system with fixed displacement pumps 36
- PVG100 – Alternative LS dump or pilot supply disconnect 36
- PVG120 – Pump disconnect/block for variable pumps 36

Other Operating Conditions

Oil, Particle Content, Degree of Contamination 38
- Mineral oil, Non-flammable fluids, Biodegradable oils 38

Filtering 39
Conversion Factors 39

Order Specification

Order Form 40
- Reordering 41

Module Selection Chart

Module Selection Chart 42

General

Valve system

Load sensing proportional valve type PVG 120 is a combined directional and flow control valve which is supplied as a valve group consisting of modules specified to match particular customer needs. The flexible nature of this valve will allow an existing valve bank to be easily adapted to suit changes in requirements.

F300 011

General characteristics

- Load-independent flow control:
  - Oil flow to an individual function is independent of the load of this function
  - Oil flow to one function is independent of the load pressure of other functions
- Good regulation characteristics
- Central pilot supply built in when the valves are actuated electrohydraulically
- Energy-saving
- Up to eight basic modules per valve group

Pump side module – PVP

- Built-in pressure relief valve
- System pressure up to 400 bar [5800 psi]
- Pressure gauge connection
- Versions:
  - Open centre version for systems with fixed displacement pumps
  - Open centre version prepared for an extra relief module
  - Closed centre version for systems with variable displacement pumps
  - Closed centre version without system pressure relief valve for variable displace ment pumps with built-in pressure relief valve.

Basic module – PVB

- Integrated pressure compensator in channel P
- Interchangeable spools
- Depending on requirements the basic module can be supplied with:
  - Shock/suction valves
  - Adjustable LS pressure limiting valve for ports A and B
  - LS connection
  - Module for oil flows exceeding 180 l/min [47.6 gpm]
  - Different spool variants

Actuation modules

The basic module is always fitted with mechanical actuation PVM, which can be combined with the following as required:

- Electrical actuation
  - PVEH- proportional, high performance (11 - 32 V⎓)
  - PVEO - On/off (12 V ⎓ or 24 V ⎓)
- Cover for hydraulic remote control, PVH
- Cover for mechanically actuated valve group, PVMD

General

Remote controls units

- PVRE, electrical control unit, 162F…

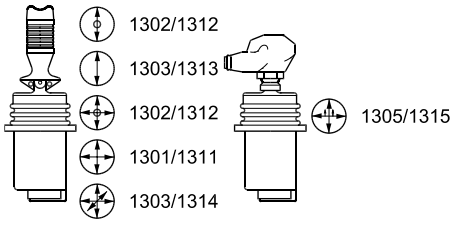

- Prof 1, 162F…



- PVREL, electrical control unit, 155U…

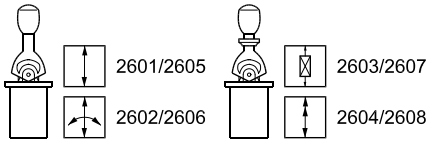

- PVRES, electrical control unit, 155B…

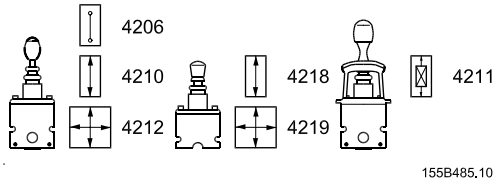

- PVRH, hydraulic control unit, 155N…

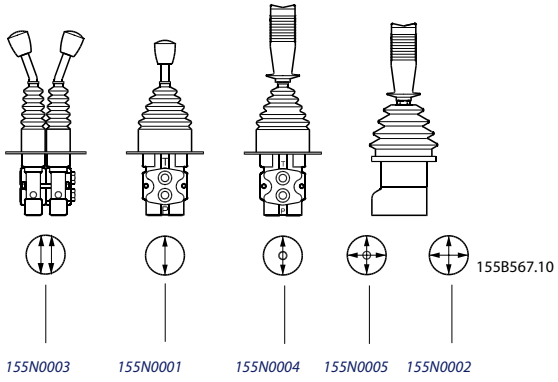

Electronic accessories

- EHF, low adjustment unit
- EHR, ramp generator
- EHS, speed control
- EHSC, closed loop speed control
- EHA, alarm logic
- EHC, closed loop position control

PVG 120 with Open Centre PVP

When the pump is started and the main spools (1) in the individual basic modules are in neutral position, oil flows from the pump, through connection P, across the pressure adjustment spool (2) to tank.
The oil flow led across the pressure adjustment spool determines the pump pressure (stand-by pressure). If a reduced stand-by pressure is required, an extra relief valve PVPH or PVPE can be used in PVP *(see characteristics for neutral flow pressure, page 25).*

When the main spools are actuated the highest load pressure is distributed across the shuttle valve circuit (3) to the spring chamber behind the pressure adjustment spool (2) and completely or partly closes the connection to tank.

The pump pressure is applied to the right-hand side of the pressure adjustment spool (2). The pressure relief valve (4) opens when the load pressure exceeds the set value, allowing pump flow to be diverted back to tank.

In the basic module the compensator (5) maintains a constant pressure drop across the main spool – both when the load changes and when a module with a higher load pressure is activated.

Shock and suction valves with a fixed setting (7) and the suction valves (8) on ports A and B are used to protect individual working functions against overload.

In the basic module it is possible to build in an adjustable LS pressure relief valve (6) to limit the pressure from each working function.
The LS pressure limiting valve saves energy:

- Without LS pressure limiting valve all the oil flow to the working function will be led across the combined shock and suction valves to tank if the pressure exceeds the fixed setting of the valves.
- With LS pressure limiting valve an oil flow of only about 2 l/min [0.5 US gal/min] will be led across the LS pressure limiting valve to tank if the pressure exceeds the valve setting.

PVG 120 with Closed Centre PVP

In the closed centre version an orifice (9) has been fitted instead of the plug. This means that the pressure adjustment spool (2) will only open to tank when the pressure in channel P exceeds the pressure relief valve setting (4).

In load sensing systems the load pressure is led to the pump regulator via the LS connection (10). So the orifices (11) have been removed, and a plug (12) has been fitted instead of one of the orifices.

In neutral position the pump regulator will set the displacement so that leakage in the system is just compensated for.

When a main spool is activated, the pump regulator will adjust the displacement so that the set differential pressure between P and LS is maintained.

The pressure relief valve (4) in PVP is set for a pressure of about 30 bar [435 psi] above maximum system pressure (set at the pump or an external pressure relief valve).
If the system or the pump regulation has a pressure relief valve, it is possible to use a PVPV pump side module, without integrated pressure adjustment spool and pressure relief valve.

PVG 120 Sectional Drawing

1. Main spool
2. Pressure adjustment spool in PVP
3. Shuttle valve
4. Pressure relief valve in PVP
5. Pressure compensator in PVB
6. LS pressure relief valve in PVB
7. Shock and suction valve PVLP
8. Suction valve PVLA
9. Orifice, closed centre PVP
   Plug, open centre PVP
10. LS connection
11. Orifice, open centre PVP
12. Plug, closed centre PVP

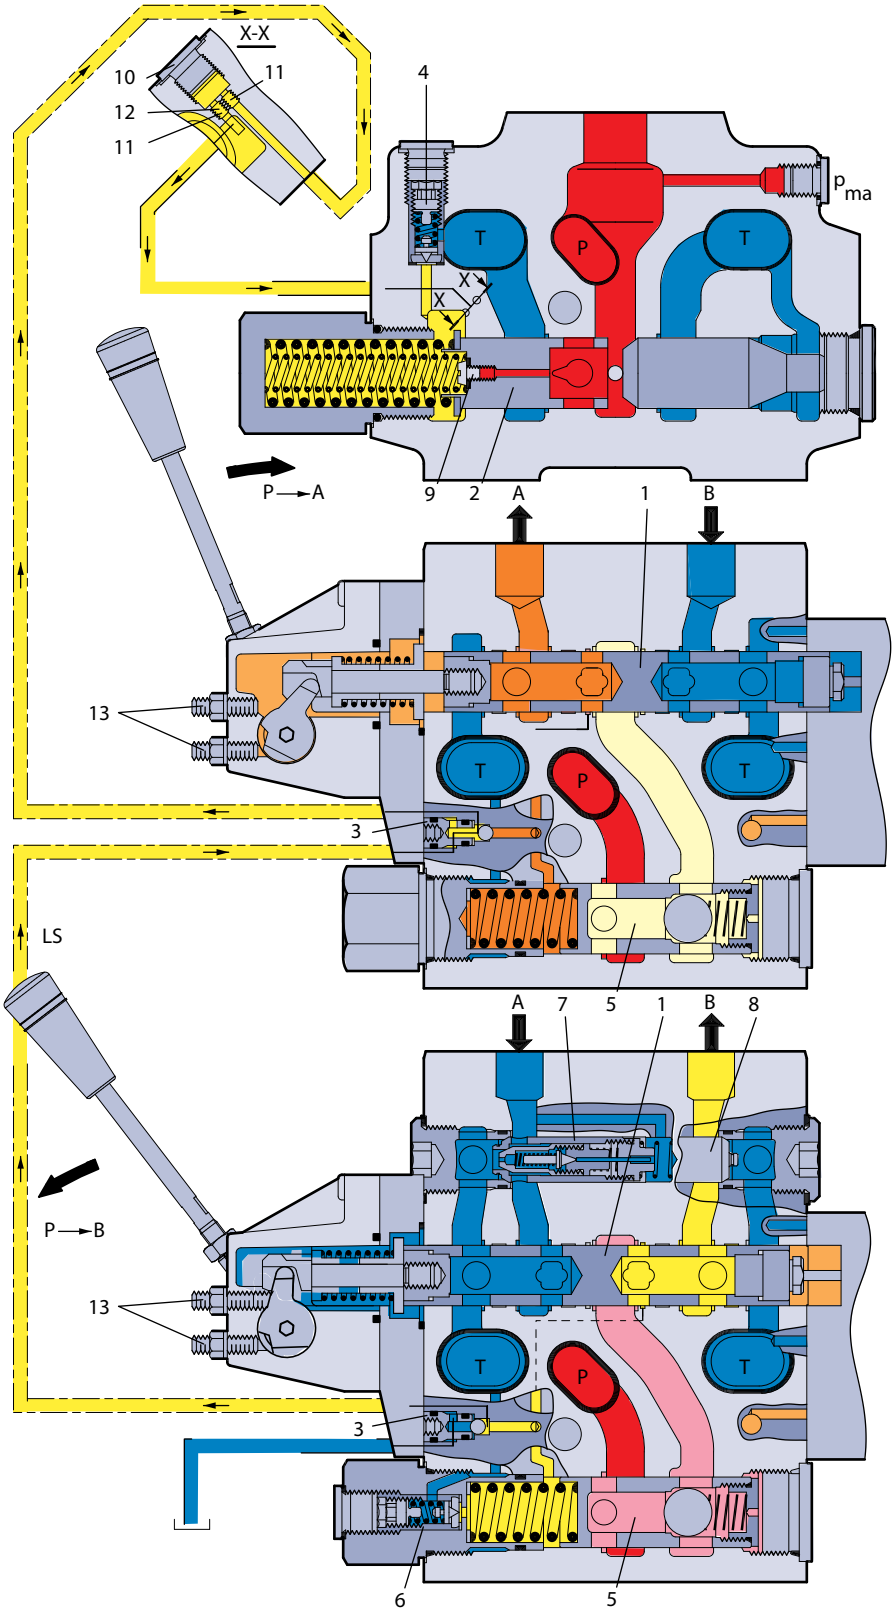

V310100.A

Examples

PVG 120 with fixed displacement pump

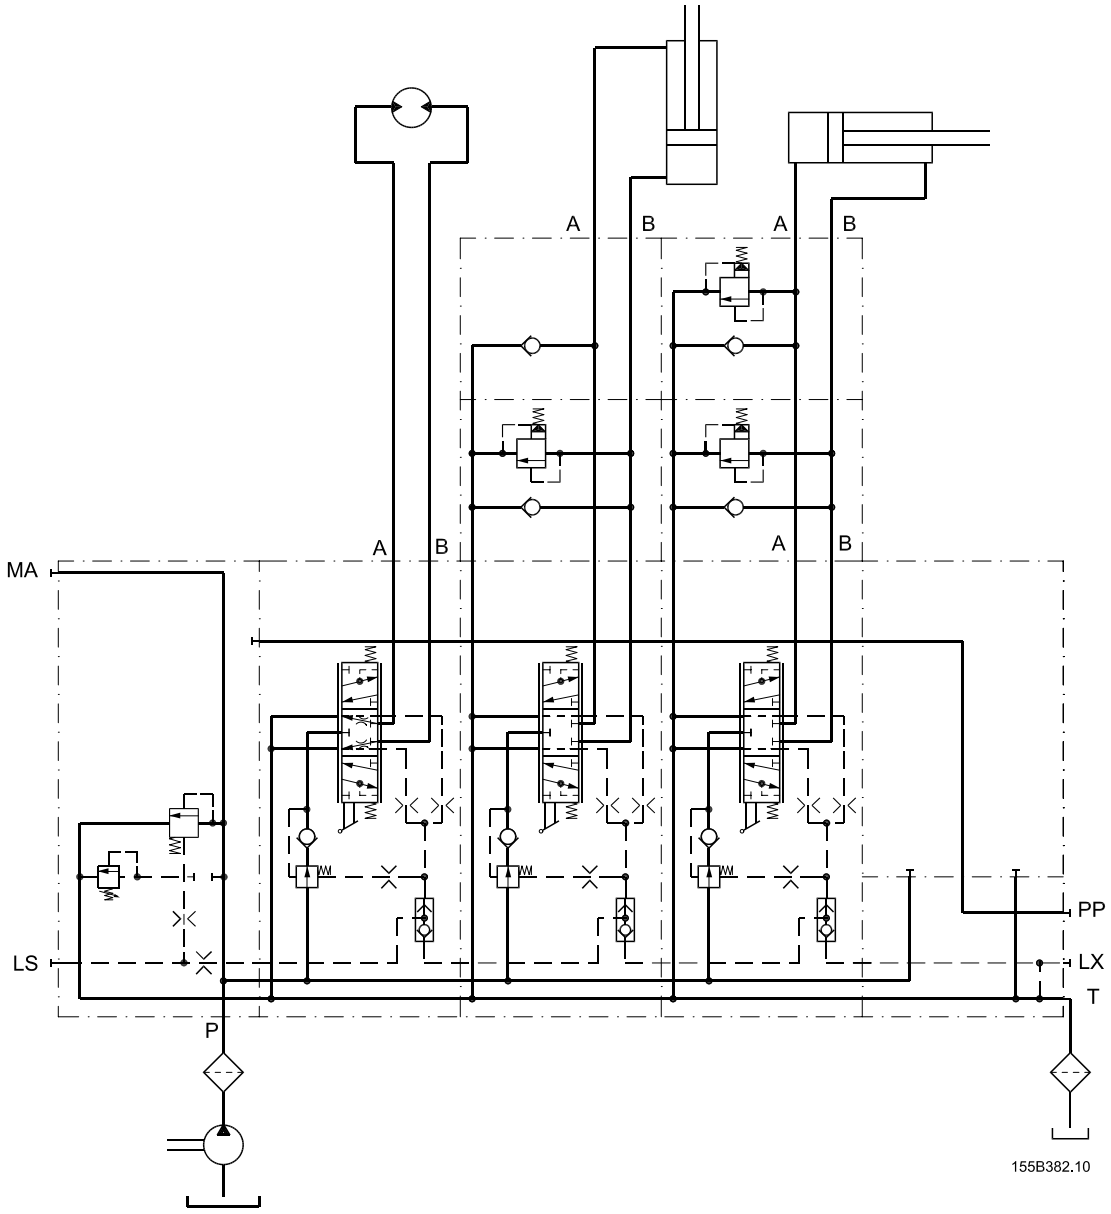

Examples

PVG 120 with variable displacement pump

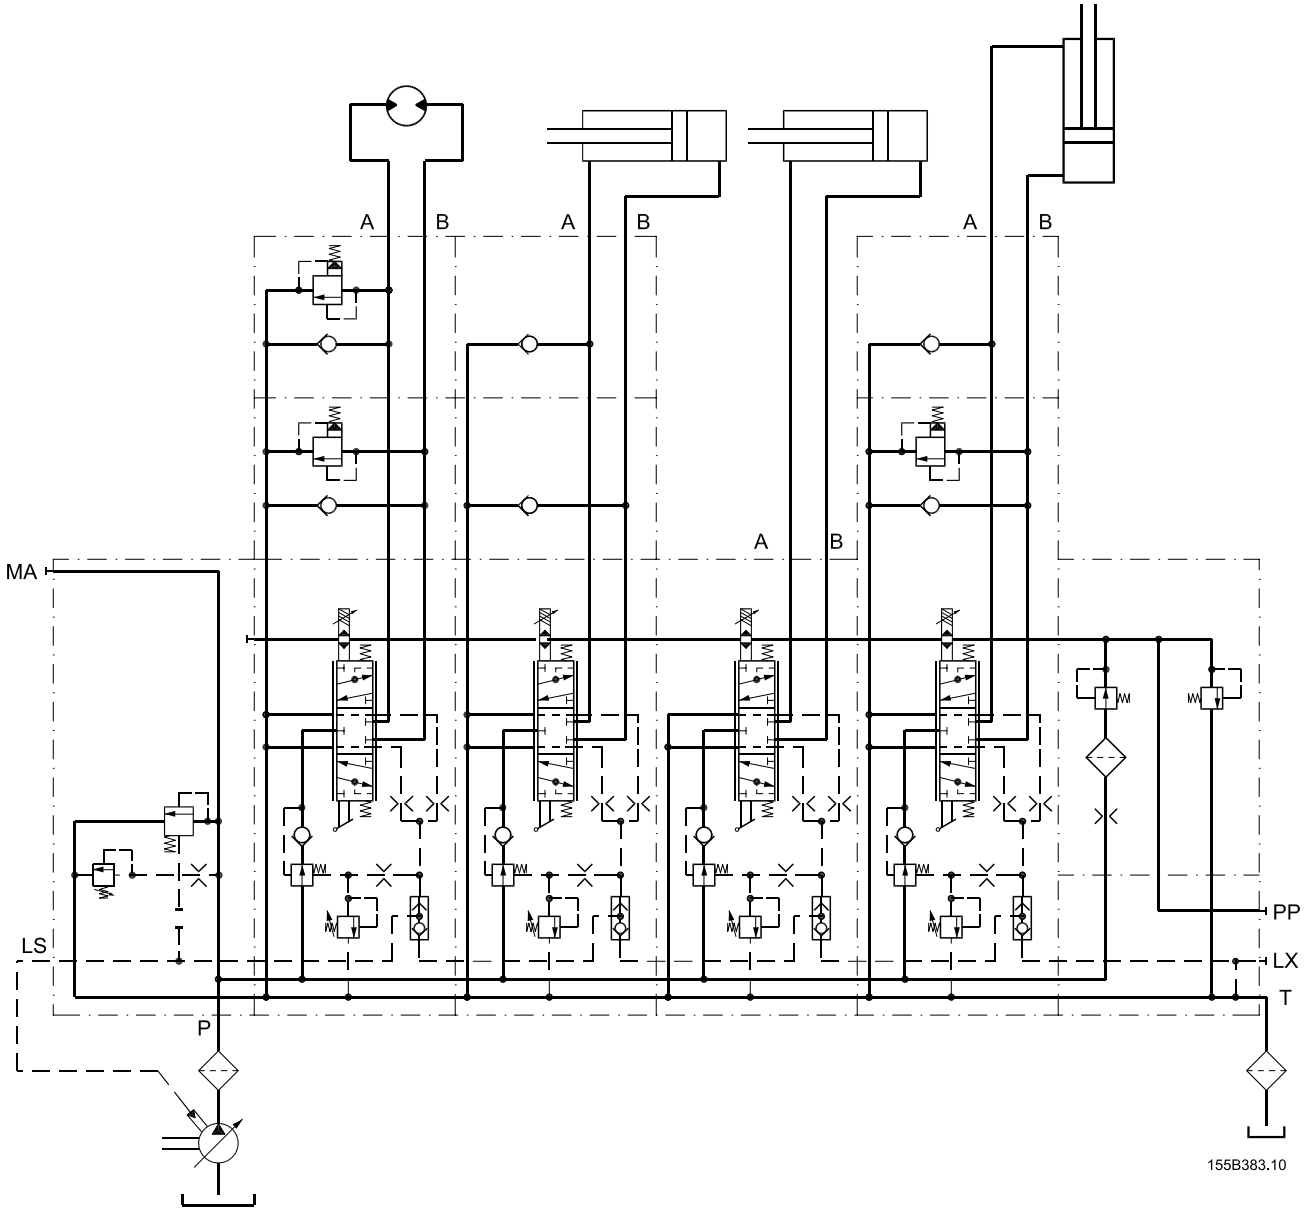

PVG 120 Valve Group

Max. pressure	**Port P**	**continuous**	350 bar	[5075 psi]
		intermittent[1)]	400 bar	[5800 psi]
	Port A/B		400 bar	[5800 psi]
	Port T, static/dynamic		25 bar/40 bar	[365/580 psi]
Oil flow, *(see characteristics page 27)*	**Port P, rated max.**		240/300 l/min	[63.4/79.3 gpm]
	Port A/B		65/95/130/180/ 210/240 l/min [2)]	[17.2/25.1/34.3/47.6/ 55.5/63.4 gpm [2)]]
Spool travel			± 8 mm	[± 0.32 in]
Dead band (± 25%)			± 2 mm	[± 0.08 in]
Max. internal leakage at 100 bar, 21 mm^2/s	**A/B→T, without shockvalve**		90 cm^3/min	[5.5 in^3/min]
	A/B→ T, with shockvalve		95 cm^3/min	[5.6 in^3/min]
Oil temperature (inlet temperature)	**Recommended temperature**		30 to 60°C	[86 to 140°F]
	Min. temperature		–30°C	[–22°F]
	Max. temperature		+90°C	[+194°F]
Ambient temperature			–30 to +60°C	[–22 to +140°F]
Oil viscosity	**Operating range**		12 to 75 mm^2/s	[65 SUS to 347 SUS]
	Min. viscosity		4 mm^2/s	[39 SUS]
	Max. viscosity		460 mm^2/s	[2128 SUS]
Filtering *(See page 39)*	**Max. contamination (ISO 4406)**		23/19/16	
Oil consumption in pressure reduction valve for PVT at PVE pilot-oil supply			0.4 l/min	[0.1 gpm]

1) Intermittent operation: the permissible values may occur for max. 10% of every minute.
2) *See page 25* regarding the ordering or conversion of valve groups for oil flows exceeding 180 l/min [47.6 gpm].

Mechanical Actuation PVM

		Neutral position	Max. spool travel
Operating force	**PVM + PVMD**	2.8 ± 0.2 N•m [24.8 ± 1.8 lbf•in]	4.0 ± 0.2 N•m [35.5 ± 1.8 lbf•in]
	PVM + PVE (without voltage)	2.8 ± 0.2 N•m [24.8 ± 1.8 lbf•in]	4.0 ± 0.2 N•m [35.5 ± 1.8 lbf•in]
	PVM + PVH	4.7 ± 0.2 N•m [41.6 ± 1.8 lbf•in]	12.8 ± 0.2 N•m [113.3 ± 1.8 lbf•in]
Possible control lever positions	**Number**	2 × 5	
Regulation range, control lever		±19,5°	

Hydraulic Actuation PVH

Control range	5 to 15 bar	[75 to 220 psi]
Max. pilot pressure, static	35 bar	[510 psi]
Max. pressure on port T *	3 bar	[45 psi]

* It is recommended that the tank connection from the hydraulic remote control unit PVRH is taken direct to tank.

PVE, Electrical Actuation

Actuation		PVEO ON/OFF	PVEH Proportional High
Hysteresis (applies to the electrical actuation only) [1]	Typical	-	4%
Reaction time from neutral position to max. spool travel	Typical	250 ms	250 ms
	Max.	350 ms	280 ms
Reaction time from max. spool travel to neutral position[2]	Typical	240 ms	150 ms
	Max.	330 ms	200 ms
Pilot oil flow pr. PVE	Neutral position without voltage	0 l/min / [US/gal min]	
	Locked with voltage [3]	0 l/min / [US/gal min]	
Enclosure to IEC 529		IP65	

1) The hysteresis is stated at rated and f = 0,02 Hz for a cycle. One cycle includes the movement from neu-tral position to max. spool travel direction A, via neutral position to max. spool travel in direction B, and back to neutral position. Further information can be obtained by contacting the Sales Organization for Sauer-Danfoss.

2) Reaction times for PVEH is reduced by 20 by 30 ms if the voltage is not interrupted during the neutral positioning (remote control lever without neutral position switch).

3) Total oil consumtion for a spool movement from N to full A or B: 0.0035 l [0.0009 US gal]

PVEO

		PVEO	
Supply voltage UDC	rated	12 V DC	24 V DC
	range	11 V to 15 V	22 V to 30 V
	max. ripple	5%	
Current consumption at rated voltage		0.65 A @ 12 V	0.33 A @ 24 V
Signal voltage (PVEM)	neutral	0.5 x UDC	
	A-port ↔ B-port	0.25 • UDC to 0.75 • UDC	
Signal current at rated voltage (PVEM)		0.25 mA	0.50 mA
Input impedance in relation to 0.5 • UDC		12 KΩ	
Power consumption		8 W	

PVEH

			PVEH	
Supply voltage UDC		rated	11 V to 32 V	
		range	11 V to 32 V	
		max. ripple	5%	
Current consumption at rated voltage			0.57 (0.33) A @ 12 V	0.3 (0.17) A @ 24 V
Signal voltage		neutral	0.5 x UDC	
		A-port ↔ B-port	0.25 • UDC to 0.75 • UDC	
Signal current at rated voltage			0.25 mA to 0.70 mA	
Input impedance in relation to 0.5 • UDC			12 KΩ	
Input capacitor			100 nF	
Power consumption			7 (3.5) W	
PVEH		Max. load	100 mA	60 mA
	Active	Reaction time at fault	500 ms	
	Passive	Reaction time at fault	250 ms	

PVPE, Electrical Relief Valve, Normally Open

Max. operation pressure		350 bar [5085 psi]	
Max. pressure drop a an flow of 0.20 l/min. [0.053 US gal/ min]		1.2 bar [17 psi]	
Oil temperature (inlet temperature)	**Recommended temperature**	30 to 60°C [86 to 140°F]	
	Min. temperature	–30°C [–22°F]	
	Max. temperature	+90°C [+194°F]	
Max. coil surface temperature		155°C [311°F]	
Ambient temperature		–30 to +60°C [–22 to +140°F]	
Oil viscosity	**Operating range**	12 to 75 mm^2/s [65 to 347 SUS]	
	Min. viscosity	4 mm^2/s [39 SUS]	
	Max. viscosity	460 mm^2/s [2128 SUS]	
Response time for pressure relief to tank		600 ms	
Enclosure to. IEC 529		IP 65	
Rated voltage		12 V	24 V
Max.permissible deviation from rated supply voltage		± 10 %	± 10 %
Current consumption at rated voltage	**at 22°C [72°F] coil temperature**	1.55 A	0.78 A
	at 85°C [230°F] coil temperature	1.00 A	0.50 A
Power consumption	**at 22°C [72°F] coil temperature**	19 W	19 W
	at 85°C [230°F] coil temperature	12 W	12 W

PVEO, ON-OFF

Main features of PVEO:

- Compact
- Robust operation
- With Hirschmann or AMP
- connector
- Low electrical power

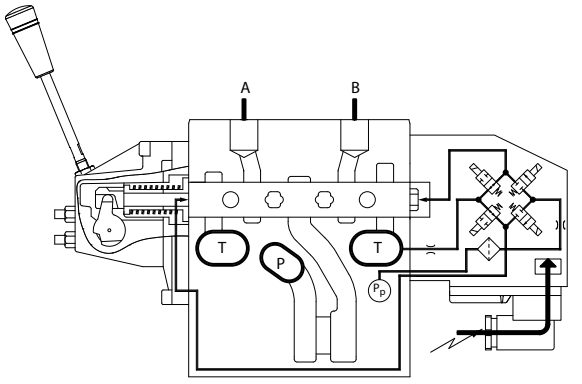

V310185.A

PVEH, Proportional High

PVEH adjusts the main spool position so that it corresponds to an electrical control signal – for example from a remote control unit.

The control signal (set-point signal) is converted into a hydraulic pressure which moves the main spool. The position of the main spool is converted in the positional transducer (C) to an electric signal (feed-back signal). This signal is registered by the electronics.

The variation between the set-point signal and feed-back signal actuates the solenoid valves. Thus the hydraulic pressure moves the main spool into the correct position.

Special features of PVEH:

- Inductive transducer
- Integrated pulse width modulation
- Low hysteresis
- Fast reaction time
- Hirschmann or AMP connector
- Fault monitoring with transistor output for signal source
- Low electrical power
- No set-up procedure

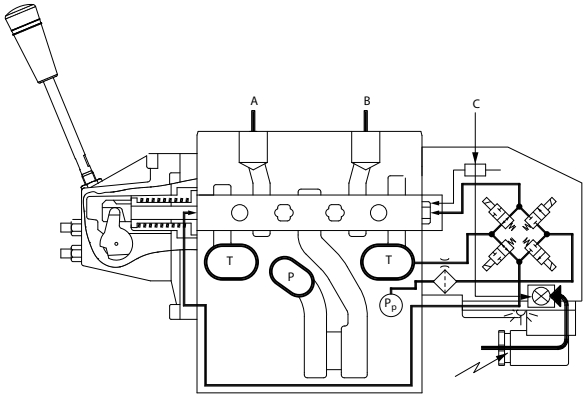

V310099.A

PVEH, LVDT-Transducer

LVDT, Inductive transducer (Linear Variable Differential Transformer)
When the main spool is moved a voltage is induced proportional to the spool position. The use of LVDT gives contact-free (proximity) registration of the main spool position. This means an extra-long working life and no limitation as regards the type of hydraulic fluid used. In addition, LVDT gives a precise position signal of high resolution.

PVEH, Pulse Width Modulation

Integrated pulse width modulation
Positioning of the main spool in PVEH is based on the pulse width modulation principle. As soon as the main spool reaches the required position, modulation stops and the spool is locked in position.

PVEH, Fault Monitoring

A fault monitoring system is provided in all PVEA, PVEH and PVES modules. The system is available in two versions:

- The active fault monitoring type, which provides a warning signal, deactivates the solenoid valves and drives the spool in neutral.
- The passive fault monitoring type, which provides a warning signal only.

Both active and passive fault monitoring systems are triggered by three main events:

1. Input signal monitoring
The input signal voltage is continuously monitored. The permissible range is between 15% and 85% of the supply voltage. Outside this range the section will switch into an active error state.

2. Transducer supervision
If one of the wires to the LVDT sensor is broken or short-circuited, the section will switch into an active error state.

3. Supervision of the closed loop
The actual position must always correspond to the demanded position (input signal). If the actual spool position is further than the demanded spool position (>12%, PVEA: >25%), the system detects an error and will switch into an active error state. On the other hand, a situation where the actual position is closer to neutral than that demanded will not cause an error state. This situation is considered "in control".
When an active error state occurs, the fault monitoring logic will be triggered:

Active fault monitoring

- A delay of 500 ms (PVEA: 750 ms) before anything happens.
- The solenoid valve bridge will be disabled and all solenoid valves will be released.
- An alarm signal is sent out through the appropriate pin connection.
- This state is memorized and continues until the system is actively reset (by turning off the supply voltage).

Passive fault monitoring

- A delay of 250 ms (PVEA: 750 ms) before anything happens.
- The solenoid valve bridge will not be disabled but still control the main spool position.
- An alarm signal is sent out through the appropriate pin connection.
- This state is not memorized. When the erroneous state disappears, the alarm signal will turn to passive again. However, the signal will always be active for a minimum of 100 ms when triggered.

PVEH, Fault Monitoring (continued)

To prevent the electronics from going into an undefined state, a general supervision of the power supply and the internal clock frequency is made. This function applies to PVEH - and will not activate fault monitoring:

1. High supply voltage
The solenoid valves are disabled when the supply voltage exceeds 36 V, and the main spool will return/stay in neutral.

2. Low supply voltage
The solenoid valves are disabled when the supply voltage falls below 8.5 V, and the main spool will return/stay in neutral.

3. Internal clock
The solenoid valves are disabled when the internal clock frequency fails, and the main spool will return/stay in neutral.

⚠ Warning
It's up to the customer to decide on the required degree of safety for the system.

Different degrees of safety are described on *pages 34 to 37*.
The fault monitoring does not work if the supply voltage to PVEH is cut off - for example by a neutral position switch.
When using PVEH with passive fault monitoring it is up to the customer to decide on the degree of safety required for the system *(see page 34)*.

Fault Monitoring Specification

Type	Fault	Delay before error out	Error mode	Error output status	Fault output on PVE [1]	LED light	Memory (reset needed)
PVEO	No fault monitoring	-	-	-	-	-	-
PVEH	Active	500 ms	No fault	Low	< 2 V	Green	-
			Input signal faults	High	~U_{DC}	Flashing red	Yes
			Transducer (LVDT)			Constant red	
			Close loop fault				
	Passive	250 ms	No fault	Low	< 2 V	Green	-
			Input signal faults	High	~U_{DC}	Flashing red	No
			Transducer (LVDT)			Constant red	
			Close loop fault				

[1] Measured between fault output pin and ground.

PVEH, Connection to Fault Monitoring Output

Normal

Green

Transistor output function

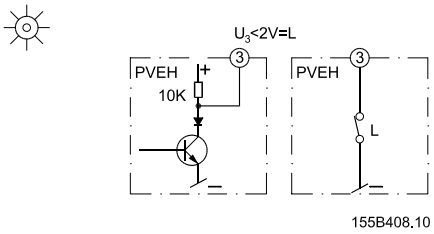

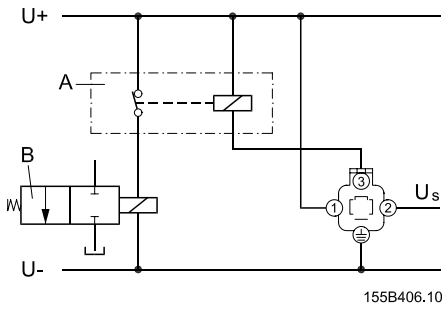

A: External relay
B: Solenoid valve (e.g. PVPE)

Fault

Red

Transistor output function

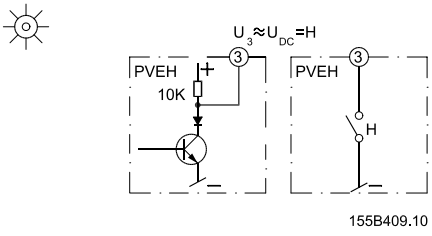

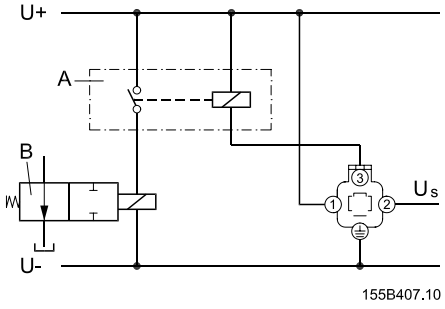

A: External relay
B: Solenoid valve (e.g. PVPE)

Via an external relay pin 3 can be connected to an electrically actuated valve which will relieve pump oil flow to tank, e.g. PVPE.

Other connections possible:
- a valve to relieve the LS signal
- a signal lamp, an alarm horn
- pump cut-out, etc.

PVP and PVPV, Pump Side Modules

Symbol	Description		Code number
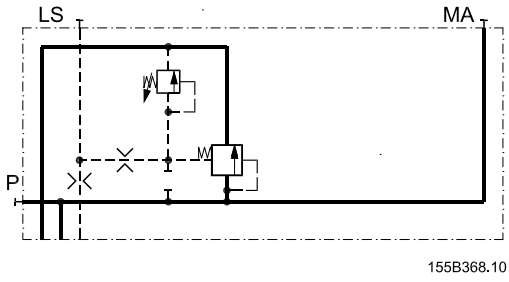 155B368.10	Open centre PVP for pumps with fixed displacement. Pressure gauge connection.	Metric flange	155G5021
		SAE flange	155G5037
		O-ring boss	155G5023
	Open centre PVP for oil flow exceeding 180 l/min. [47.55 US gallon/min]. For pumps with fixed displacement. Pressure gauge connection	Metric flange	155G5027
		SAE flange	155G5029
		O-ring boss	155G5028
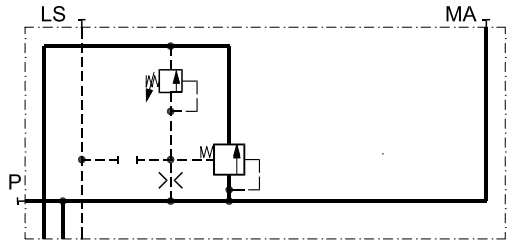 155B371.10	Closed centre PVP for pumps with variable displacement. Pressure gauge connection.	Metric flange	155G5020
		SAE flange	155G5038
		O-ring boss	155G5022
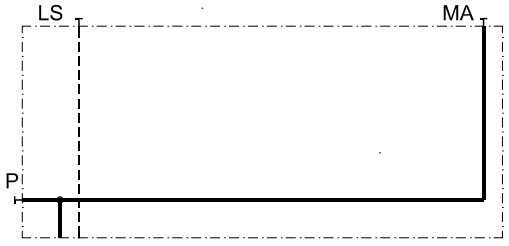 155B372.10	Closed centre PVPV without pressure relief valve. For pumps with variable displacement. Pressure gauge connection	Metric flange	155G5030
		SAE flange	155G5032
		O-ring boss	155G5031

Port connections: P = 1 in SAE flange (415 bar [6020 psi]); MA = G $^1/_4$; LS = G $^3/_8$
P = 1 $^1/_{16}$ - 12 UN O-ring Boss 6020 psi; MA = $^1/_2$ - 20 UNF O-ring Boss; LS = $^3/_4$ - 16 UNF O-ring Boss

PVP, Accessories for Open Centre Pump Side Modules

Symbol	Description	Code number
	Prop, PVPD	155G5041
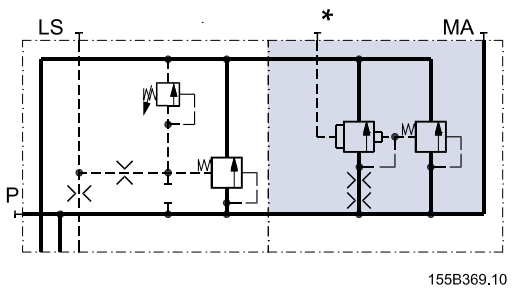	PVEH, hydraulically actuated relief valve	155G5061*
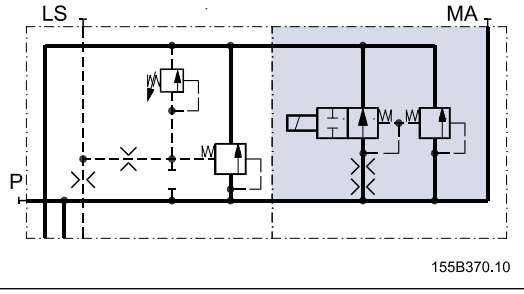	PVPE, electrically actuated relief valve. Normally open solenoid valve (12 V ⎓) (24 V ⎓)	155G5052 155G5054

* Connection for external pilot pressure: only available with G $^{1}/_{4}$ thread

PVB, Basic Modules

Symbol	Description		Code number	
			No facilities for shock valves A/B (low modules)	Facilities for shock valves A/B (high modules)
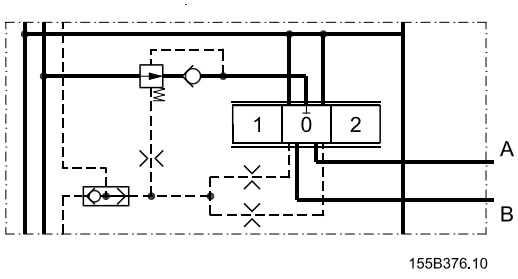 155B376.10	Pressure compensated basic module	Metric flange	155G6014	155G6005
		SAE flange	155G6016	155G6007
		O-ring boss	155G6015	155G6006

Port connections: A/B: $^{3}/_{4}$ in SAE flange 415 bar (6020 psi);
A/B: 1 $^{1}/_{16}$ - 12 UN O-ring Boss 415 bar (6020 psi)

PVB, Accessories for Basic Modules

Symbol	Description	Code number
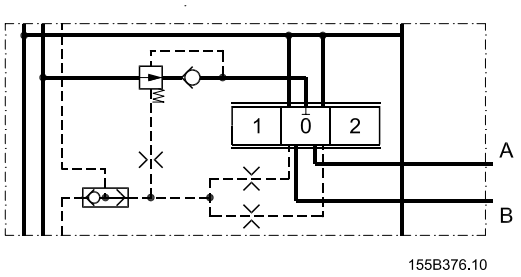	PVBP, plug	155G6081
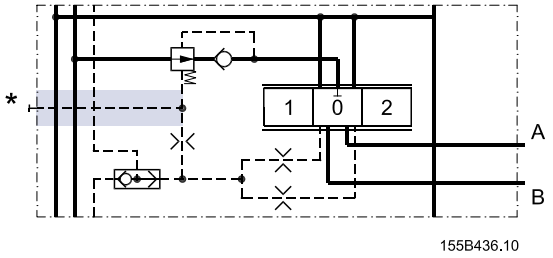	PVBU, module for oil flow exceeding 180 l/min [47.6 US gallon/min]. Connection for external LS pressure relief.	155G6035
	PVBC, connection for external LS pressure relief.	155G6082
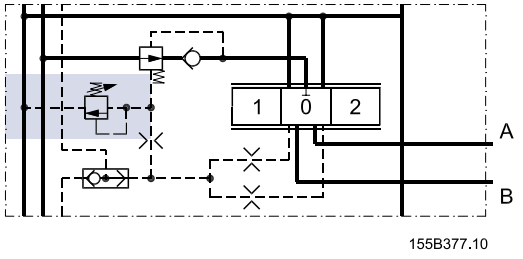	PVBR, LS-pressure relief valve for ports A/B-port	155G6080

Port connections: G 1/4: only available with G 1/4 thread

PVLP, Shock and Suction Valves for A and B Port Connections

Symbol	Fixed setting		Code number
	bar	[psi]	
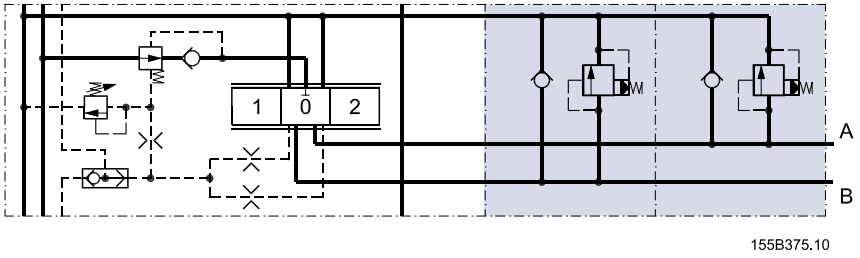 155B375.10	50	[725]	155G0050
	75	[1100]	155G0075
	100	[1450]	155G0100
	125	[1800]	155G0125
	150	[2200]	155G0150
	175	[2550]	155G0175
	200	[2900]	55G0200
	225	[3240]	155G0225
	250	[3650]	155G0250
	275	[4000]	155G0275
	300	[4350]	155G0300
	325	[4700]	155G0325
	350	[5100]	155G0350
	375	[5450]	155G0375
	400	[5800]	155G0400

PVLA, Suction Valve

Symbol	Code number
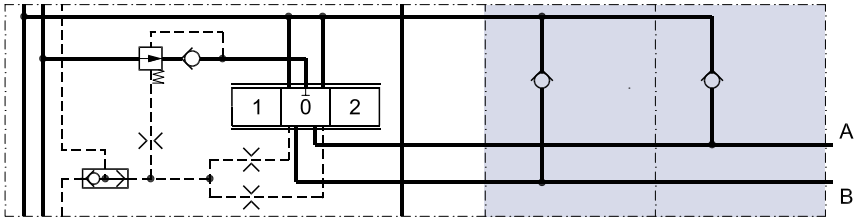 155B374.10	155G1065

PVBS, Main Spools

Symbol	ISO Symbol	Description	Code number Size			
			A 65 l/min [17.2 US gal/min]	B 95 l/min [25.1 US gal/min]	C 130 l/min [34.3 US gal/min]	D[1] 180 l/min [47.6 US gal/min]
		4-way, 3-position. Closed neutral position	155G6452	155G6454	155G6456	155G6458
		4-way, 3-position. Throttled, open neutral position		155G6464	155G6466	155G6468
		3-way, 3-position P → B			155G6476	155G6478

1) Main spool D is used for oil flow exceeding 180 l/min [47.6 US gal/min]

PVM, Mechanical Actuation

Symbol	Description		Code number
 155B387.10	PVM, standard, spring centered mechanical actuation. Individual oil flow adjustment to ports A and B.	22.5°	155G3040
		37,5°	155G3041
 155B387.10	PVM, mechanical actuation for hydraulically operated valves. Individual oil flow adjustment to ports A and B.	22,5°	155G3050
		37,5°	155G3051

PVMD, Cover for Mechanical Actuation

Symbol	Description	Code number
	PVMD, cover for purely mechanically operated valve.	155G4061

PVH, Hydraulic Actuation

Symbol	Description		Code number
 155B339.10	PVH, cover for hydraulically operated valve.	G 1/4	155G4022
		1/2 in-20 UNF	155G4021

PVE, Electrical Actuation

Symbol	Description		Code number Hirschmann	Code number AMP
 155B388.10	PVEO, ON/OFF	12 V	155G4272	155G4282
		24 V	155G4274	155G4284
 155B389.10	PVEH, Proportional high. Puls width modulation, short reaction time, low hysteresis, **active** fault monitoring, inductive transducer		155G4092	155G4094
 155B389.10	PVEH, Proportional high. Puls width modulation, short reaction time, low hysteresis, **passive** fault monitoring, inductive transducer		155G4093	155G4095

PVT, Tank Side Modul

Symbol	Description		Code number
Upper part 	Upper part: Without active elements	Metric flange	155G7020
		SAE flange	155G7022
		O-ring boss	155G7021
	Upper part: With LX connection	Metric flange	155G7023
		SAE flange	155G7025
		O-ring boss	155G7024
Lower part 	Lower part: Without active elements	Mounting	155G7060
		Mounting thread UNF	155G7062
Lower part 	Lower part: PVE, pilot oil supply for electrical actuations. Filter mesh: 125µm	Mounting thread metric	155G7040
		Mounting thread UNF	155G7042
Lower part 	Lower part: PVH, pilot oil supply for hydraulic actuations. Filter mesh: 125µm	Mounting thread metric	155G7043
		Mounting thread UNF	155G7044

Port connections: T = 1 in SAE flange 210 bar [3045 psi]; PP = G 3/8 [3/8 in SAE] LX = G 3/8 [3/8 in SAE].
T = 15/16 - 12 UN O-ring Boss 3045 psi; PP = 3/4 - 16 UNF O-ring Boss; LX = 3/4 - 16 UNF O-ring Boss

PVAS, Assembly Kit

	Code number 155G...							
	1 PVB	2 PVB	3 PVB	4 PVB	5 PVB	6 PVB	7 PVB	8 PVB
Tie bolts and seals	155G8031	155G8032	155G8033	155G8034	155G8035	155G8036	155G8037	155G8038

Modules for Oil Flow Exceeding 180 l/min [47.6 US gal/min]

Pump with fixed displacement

1. Ordering:
   Order accessory module 155G6035, main spool D, and pump side modules 155G5027/155G5028/155G5029

2. Conversion:
   In open centre systems a max. oil flow exceeding 180 l/min [47.6 US gal/min] is achieved by changing the following parts in the pump side and basic modules:
   - Open centre pump side module
     a. Pressure adjustment spool
     b. The springs behind the pressure adjustment spool
     c. The plug behind the pressure adjustment spool
        Parts from kit 155G5035 may be used.
   - Closed centre pump side module

A closed centre pump side module can be changed into an upgraded open centre pump side module by means of kit 155G5035.

- Basic module
  d. Spring behind pressure compensator
  e. The plug behind the pressure compensator

Spring and plug with code number 155G6035 (PVBU, accessory module).

Pump with variable displacement

1. Ordering:
   Order accessory module 155G6035 and main spool D.

2. Conversion:
   In closed centre systems a max. oil flow exceeding 180 l/min [47.6 US gal/min] can be achieved by changing the following basic module parts:
   a) Spring behind pressure compensator
   b) The plug behind the pressure compensator

The code number of the spring and plug is 155G6035 (PVBU, accessory module).

General

All characteristics and values in this Technical Information are typical measured results. For the hydraulic system a mineral based hydraulic oil with a viscosity of 21mm^2/s [102 SUS] and a temperature of 50°C [122°F] was used.

PVP, Pump Side Module

PVP, pressure relief valve characteristic

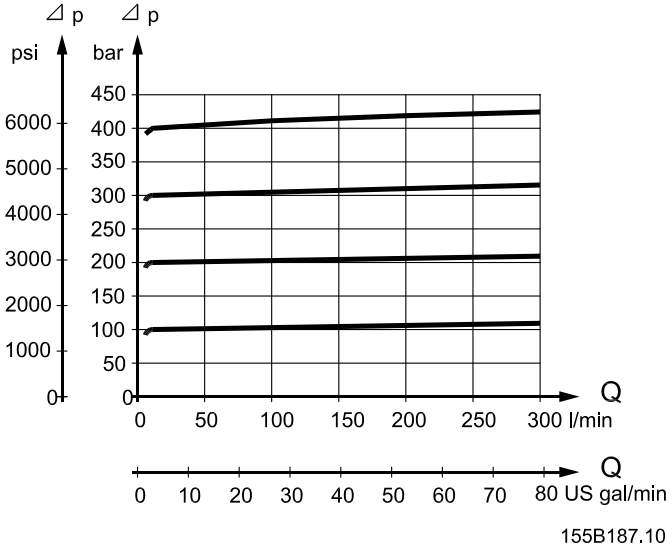

The pressure relief valve is adjustable within the 50-400 bar [725-6225 psi] range by means of a screw.

PVP, neutral flow pressure in PVP, open centre

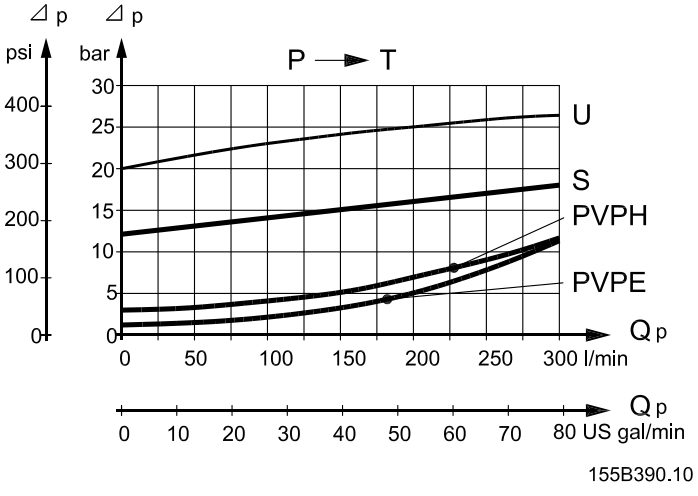

U = PVP for PVB oil flow > 180 l/min [47.6 US gal/min]
S = PVP, standard

PVB, Basic Module

Oil flow characteristics

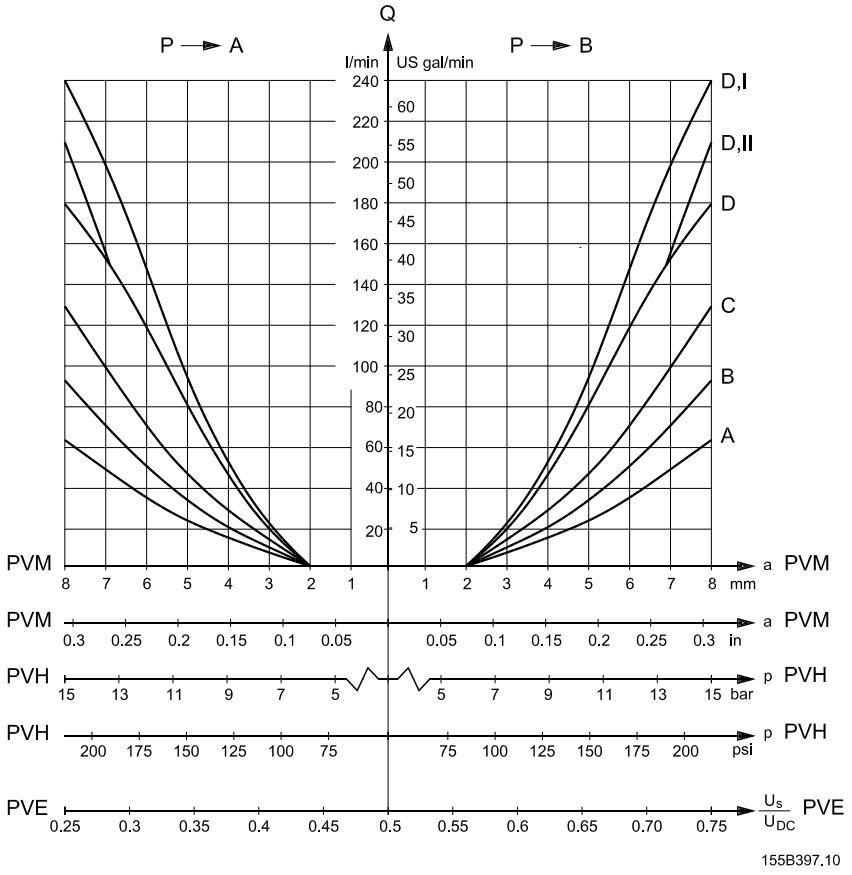

A : 65 l/min [17.2 US gal/min] rated oil flow
B : 95 l/min [25.1 US gal/min] rated oil flow
C : 130 l/min [34.3 US gal/min] rated oil flow
D : 180 l/min [47.6 US gal/min] rated oil flow
D.I : 240 l/min [63.4 US gal/min] rated oil flow
(Closed centre system with basic module for oil flow > 180 l/min [47.6 US gal/min])
D.II : 210 l/min [55.5 US gal/min] rated oil flow
(Open centre system with basic module for oil flow > 180 l/min [47.6 US gal/min] and pump side module 155G5027/155G5028/155G5029).
U_S = Signal voltage
U_{DC} = Supply voltage

PVB, Basic Module

Load independent oil flow

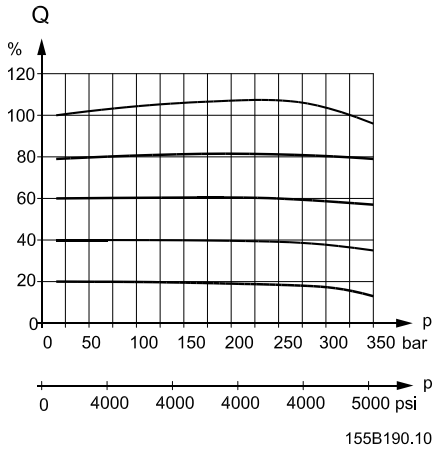

Pressure drop (Q) T in neutral position (spools with open neutral position) (p)

The oil flow (Q) is shown as a function of the load (p).

Pressure drop A/B → T at full spool travel

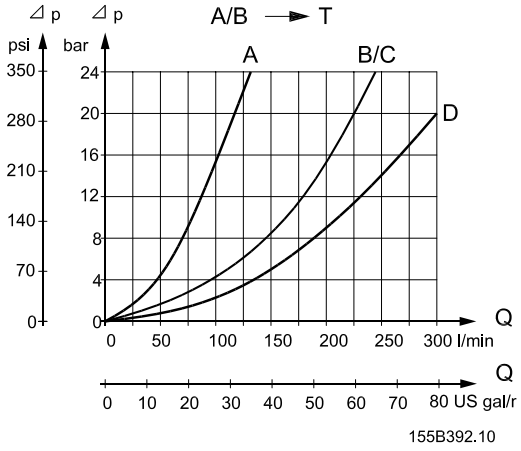

Pressure drop A/B → T in neutral position (spools with open neutral position)

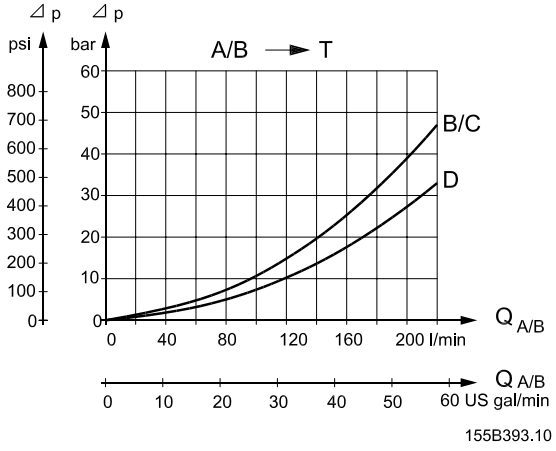

PVLP, Shock Valve (Pressure Relief Valve in PVLP)

The shock valve PVLP is designed to absorb shock effects. Consequently, it shall not be used as a pressure relief valve.

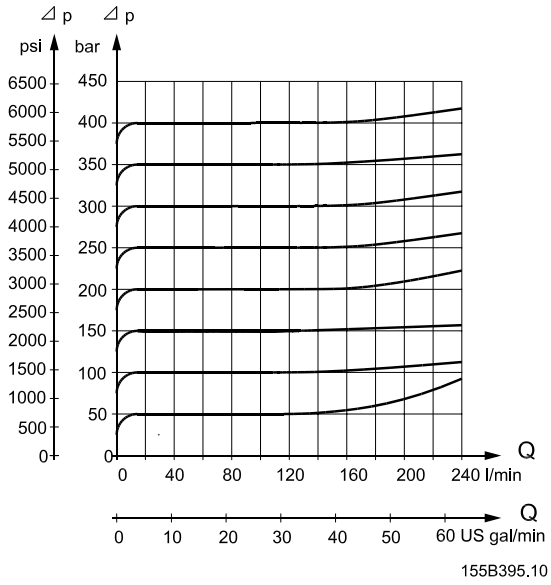

PVLP/PVLA, Suction Function

PVLP/PVLA, suction function characteristics

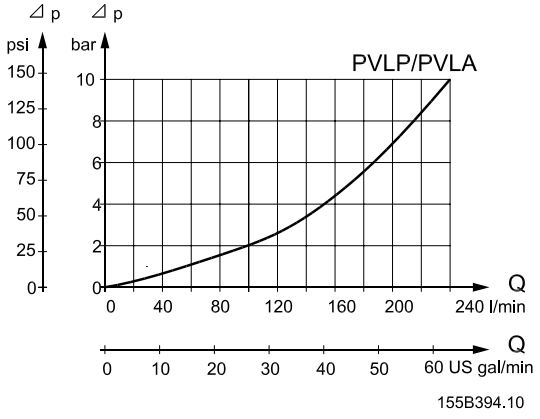

Valve Dimensions

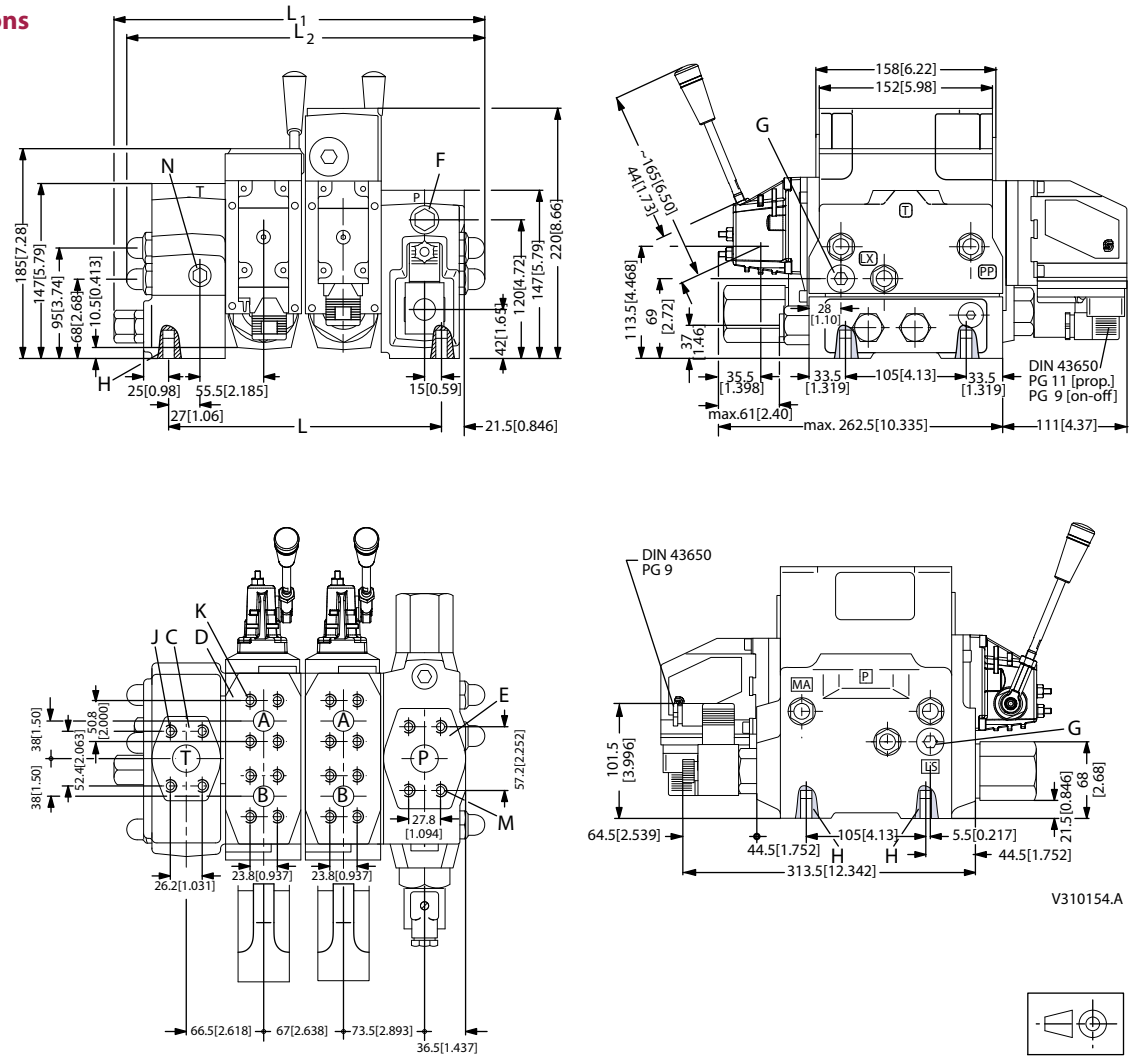

V310154.A

V310153.B

C : 1 in SAE flange (210 bar) – [1 in SAE flange/1 $^{5}/_{16}$ - 12 UN O-ring Boss (3045 psi)]
D : ¾ in SAE flange (415 bar) – [$^{3}/_{4}$ in SAE flange/1 $^{1}/_{16}$ - 12 UN O-ring Boss (6020 psi)]
E : 1 in SAE flange (415 bar) – [1 in SAE flange/1 $^{5}/_{16}$ - 12 UN O-ring Boss (6020 psi)]
F : G ¼ – [$^{1}/_{2}$ in - 20 UNF]
G : G $^{3}/_{8}$ – [$^{3}/_{4}$ in - 16 UNF]
H : M12; 18 mm deep – [$^{7}/_{16}$ - 14 UNC; 0.7 in deep]
J : M10; 17 mm deep – [$^{3}/_{8}$ - 16 UNC; 0.7 in deep]
K : M10; 17 mm deep – [$^{3}/_{8}$ - 16 UNC; 0.7 in deep]
M : M12; 18 mm deep – [$^{7}/_{16}$ - 14 UNC; 0.7 in deep]
N : G $^{3}/_{8}$ – [$^{3}/_{4}$ in - 16 UNF]

PVB		1	2	3	4	5	6	7	8
L	mm	170	237	304	371	438	505	572	639
	in	[6.69]	[9.33]	[11.97]	[14.61]	[17.24]	[19.88]	[22.51]	[25.16]
L1	mm	263.5	330.5	397.5	464.5	531.5	598.5	665.5	732.5
	in	[10.38]	[13.02]	[15.66]	[18.30]	[20.94]	[23.58]	[26.22]	[28.86]
L2	mm	255	322	389	456	523	590	657	724
	in	[10.05]	[12.69]	[15.33]	[17.97]	[20.61]	[23.25]	[25.89]	[28.53]

General Dimensions

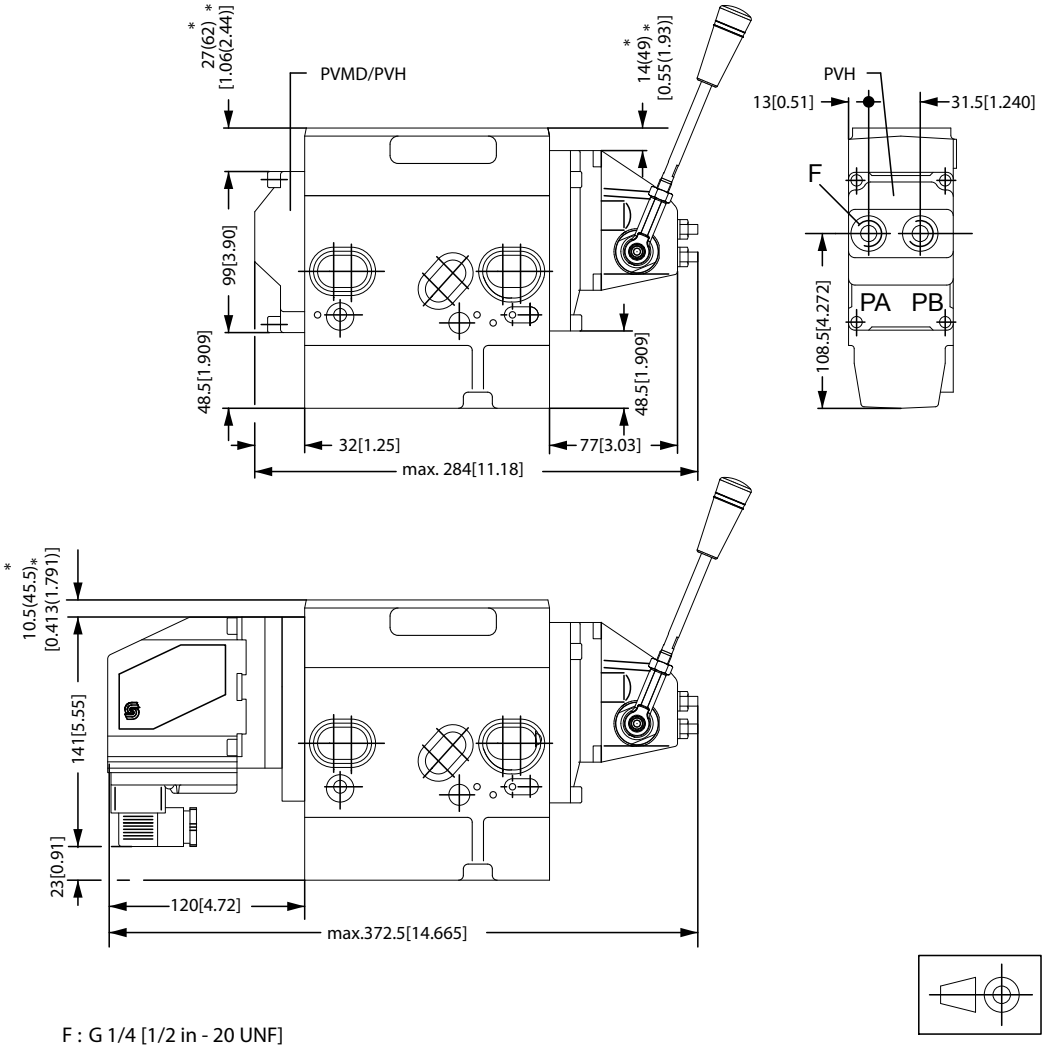

F : G 1/4 [1/2 in - 20 UNF]

* Dimensions in parenthesis apply to high basic modules

V310103.A

PVM, Lever Positions

Base with an angle of 37.5°

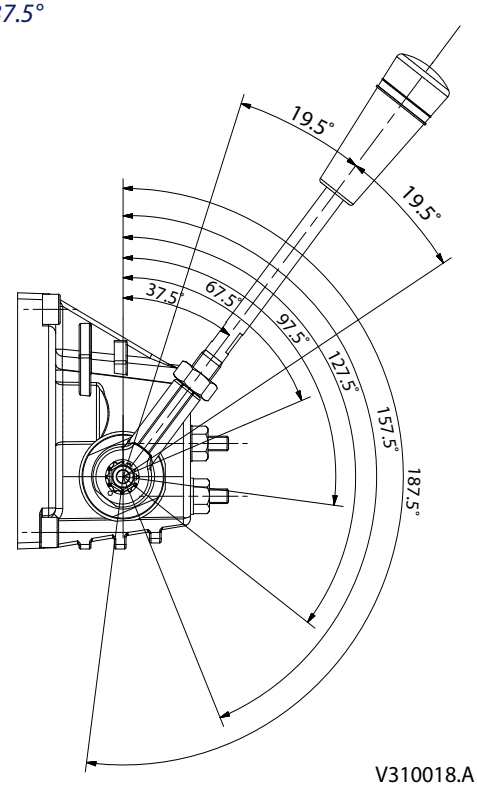

V310018.A

Base with an angle of 22.5°

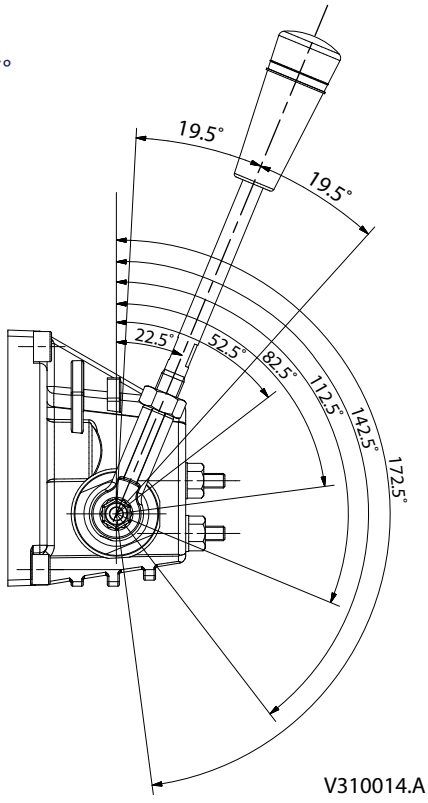

V310014.A

Building in Safety

All makes and all types of control valves (incl. proportional valves) can fail. Thus the necessary protection against the serious consequences of function failure should always be built into the system. For each application an assessment should be made for the consequences of pressure failure and uncontrolled or blocked movements.

To determine the degree of protection that is required to be built into the application, system tools such an FMEA (Failure Mode and Effect Analysis) and Hazard and Risk Analysis can be used.

FMEA (Failure Mode and Effect Analysis) IEC EN 61508

FMEA is a tool used for analyzing potential risks. This analytical technique is utilized to define, identify, and prioritize the elimination or reduction of known and/or potential failures from a given system before it is released for production.
Please refer to IEC FMEA Standard 61508.

Hazard and Risk Analysis ISO 12100-1 / 14121

This analysis is a tool used in new applications as it will indicate whether there are special safety considerations to be meet according to the machine directives EN 13849. Dependent on the determined levels conformety this analysis will detirmine if any extra requirements for the product design, development process, production process or maintenance, i.e. the complete product life cycle.

⚠ Warning

All makes/brands and types of directional control valves – inclusive proportional valves – can fail and cause serious damage. It is therefore important to analyze all aspects of the application.
Because the proportional valves are used in many different operation conditions and applications, the manufacturer of the application is alone responsible for making the final selection of the products – and assuring that all performance, safety and warning requirements of the application are met.
The process of choosing the control system – and safety levels – is governed by the machine directives EN 13849 (Safety related requirements for control systems).

Control System Example

Example of a control system for manlift using PVE Fault monitoring input signals and signals from external sensors to ensure the PLUS+1™ main controllers correct function of the manlift.

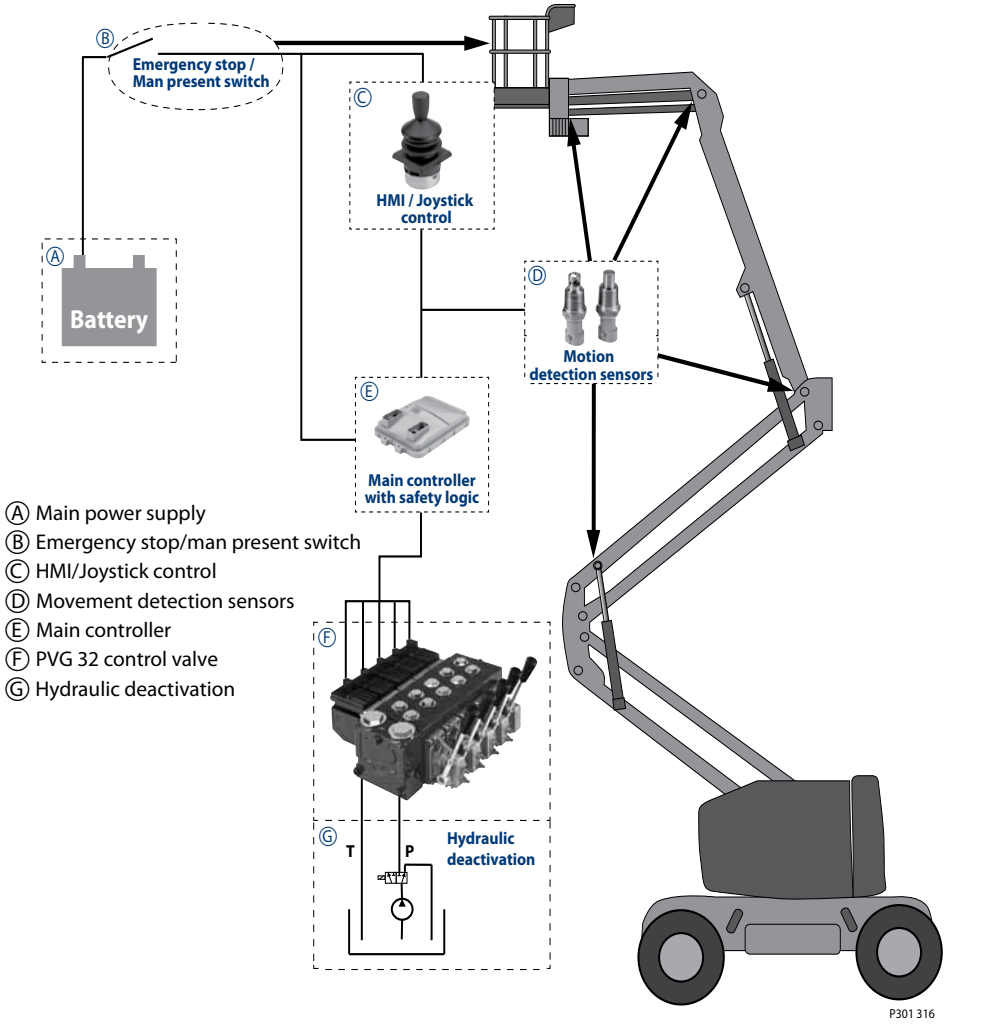

Electrical block diagram for above illustration

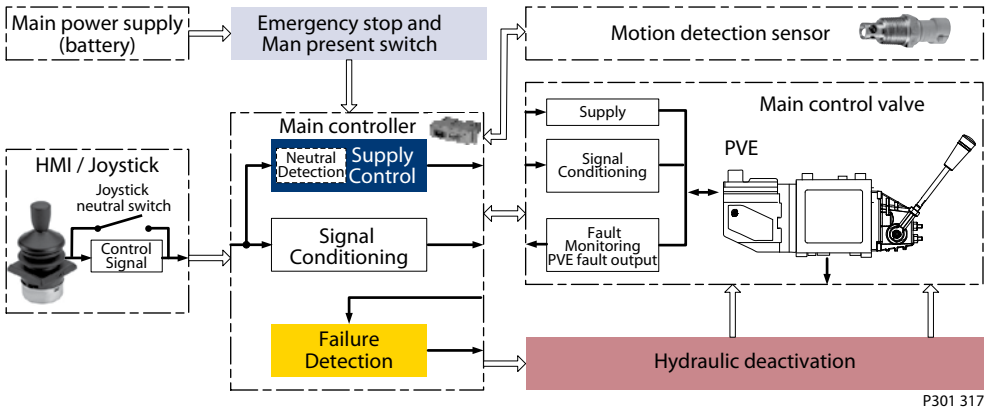

⚠ Warning

It is the responsibility of the equipment manufacturer that the control system incorporated in the machine is declared as being in confirmity with the relevant machine directives.

Control System Example (continued)

Example of a typical wiring block diagram using PVEH with neutral power off switch and fault monitoring output for hydraulic deactivation.

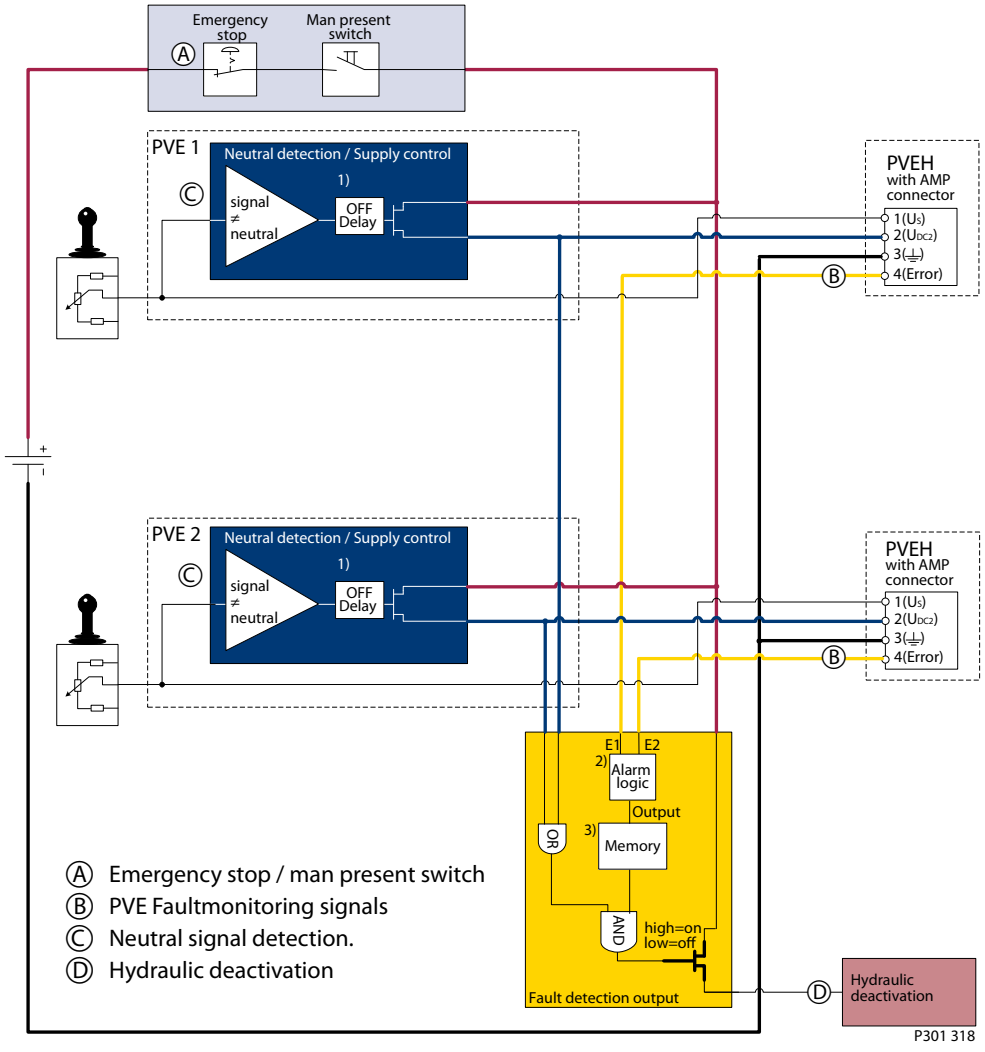

System Control Logic e.g. PLUS+1™ for signal monitoring and triggering signal for deactivation of the hydraulic system.

⚠ Warning

It is the responsibility of the equipment manufacturer that the control system incorporated in the machine is declared as being in confirmity with the relevant machine directives.

Control System Example (continued)

Example of fault monitoring for deactivation of the hydraulic system with extra fault inputs using the PVE's with DI (Direction Indication) function.

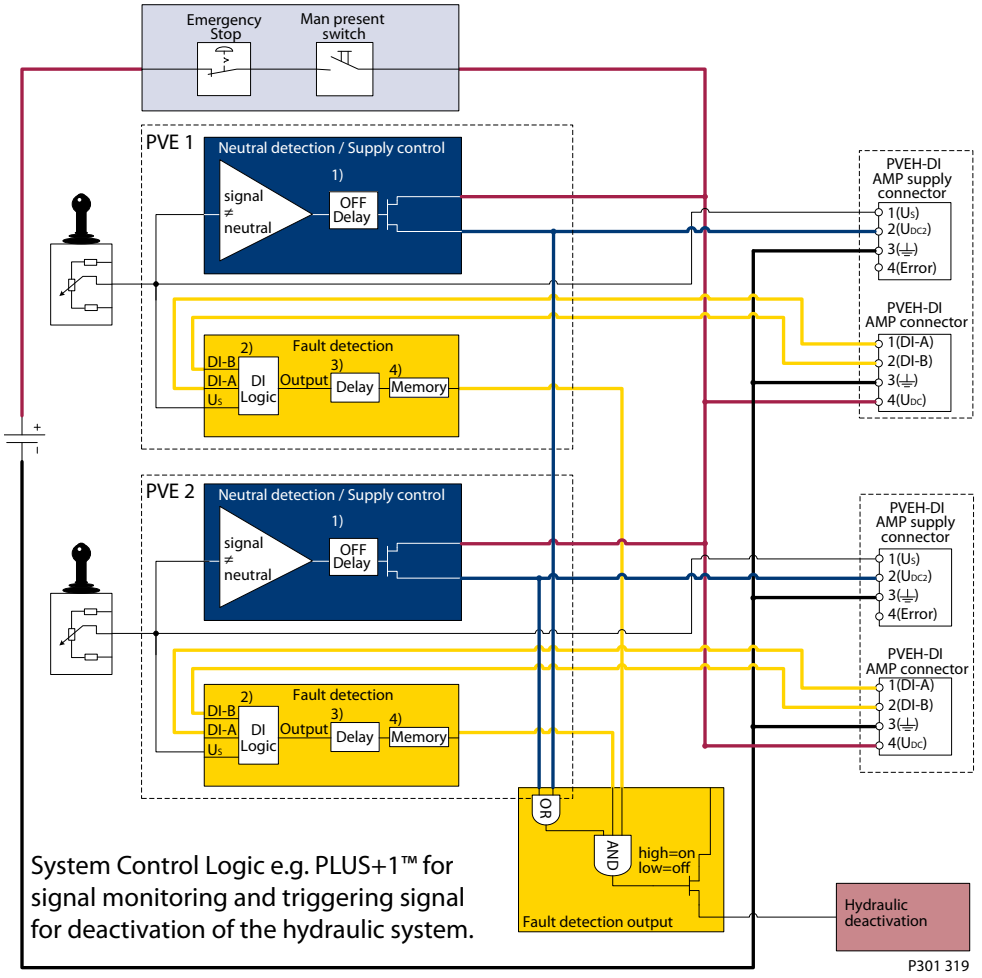

⚠ Warning

It is the responsibility of the equipment manufacturer that the control system incorporated in the machine is declared as being in confirmity with the relevant machine directives.

Other non-electrical modules which can be used in connection with hydraulic deactivation at different levels.

PVG32 – Mainly used in system with fixed displacement pumps

- PVSK, commonly used in crane application - full flow dump
- PVPX, LS dump to tank

PVG100 – Alternative LS dump or pilot supply disconnect

- PVPP, pilot oil supply shut off
- External cartridge valve connecting LS Pressure to Tank
- External cartridge valve connecting main Pressure to Tank

PVG120 – Pump disconnect/block for variable pumps

- PVPE, full flow dump for the PVG 120

Notes

Oil

The main duty of the oil in a hydraulic system is to transfer energy; but it must also lubricate the moving parts in hydraulic components, protect them against corrosion, and transport dirt particles and heat out of the system. It is therefore important to choose the correct oil with the correct additives. This gives problem-free operation and long working life.

Mineral oil

For systems with PVG 120 valves Sauer-Danfoss recommends the use of mineral-based hydraulic oil containing additives: Type H-LP (DIN 51524) or HM (ISO 6743/4).

Non-flammable fluids

Phosphate-esters (HFDR fluids) can be used without special precautions. However, dynamic seals must be replaced with FPM (Viton) seals. Please contact the Sauer-Danfoss Sales Organisation if the PVG 120 valve is to be used with phosphate-esters.
The following fluids should only be used according to agreement with the Sales Organisation for Sauer-Danfoss:

- Water-glycol mixtures (HFC fluids)
- Water-oil emulsions (HFB fluids)
- Oil-water emulsions (HFAE fluids)

Biodegradable oils

PVG 120 valves can be used in systems using rape-seed oil. The use of rape-seed oil is conditional on

- it complying with the demands on viscosity, temperature and filtration etc. *(see chapters below and technical data page 10).*
- the operating conditions being adapted to the recommendations of the oil supplier.

Before using other biodegradable fluids, please consult the Sauer-Danfoss Sales Organisation.

Particle Content, Degree of Contamination

Oil filtration must prevent the particle content from exceeding an acceptable level, i.e. an acceptable degree of contamination.
Maximum contamination for PVG 120 is 23/19/16 (see ISO 4406).
Calibration in accordance with the ACFTD method.

In our experience a degree of contamination of 23/19/16 can be maintained by using a filter fineness as described in the next section.

Filtering

Effective filtration is the most important precondition in ensuring that a hydraulic system performs reliably and has a long working life. Filter manufacturers issue instructions and recommendations. It is advisable to follow them.

System filters

Where demands for safety and reliability are very high a pressure filter with bypass and indicator is recommended. Experience shows that a 10 µm nominal filter (or finer) or a 20 µm absolute filter (or finer) is suitable.
It is our experience that a return filter is adequate in a purely mechanically operated valve system.

The fineness of a pressure filter must be selected as described by the filter manufacturer so that a particle level of 23/19/16 is not exceeded. See "Particle content, degree of contami-nation".
The filter must be fitted with pressure gauge or dirt indicator to make it possible to check the condition of the filter.

In systems with differential cylinders or accumulators the return filter must be sized to suit the max. return oil flow. Pressure filters must be fitted to suit max. pump oil flow.

Internal filters

The filters built into PVG 120 are not intended to filter the system but to protect important components against large particles.
Such particles can appear in the system as a result of pump damage, hose fracture, use of quick-couplings, filter damage, starting up, contamination, etc.

The filter that protects the pilot supply in the tank side module has a mesh of 125 µm. It is obtainable as a spare part and is easy to replace.

The filter protecting the essential PVE parts has a mesh of 125 µm.

Conversion Factors

1 Nm	=	885.1 lbf·in
1 N	=	22.48 lbf·in
1 bar	=	14.50 psi
1 mm	=	0.0394 in
1 cm^3	=	0.061 in^3
1 l	=	0.22 gallon, UK
1 l	=	0.264 gallon, US
°F	=	1.8 • °C + 32

Order Form

An order form for Sauer-Danfoss PVG 120 hydraulic valve is shown on next page.
The form can be obtained from the Sauer-Danfoss Sales Organisation.
The module selection chart on the next page and the order form are divided into fields.

Each module has its own field:
0: PVP, pump side modules
d: PVPD, PVPH and PVPE, accessory modules
1-8: PVB, basic modules
e: PVBS, main spools
f: PVBP, PVBR, PVBU and PVBC, accessory modules
a: PVM, mechanical actuation
c: PVMD, cover for mechanical operation
PVH, cover for hydraulic operation
PVEO and PVEH, electrical actuations
b: PVLP, shock and suction valve
PVLA, suction valve
9: PVT, tank side module
10: PVAS, assembly kit

Please state:
- Code numbers of all modules required
- Required setting (p) for pump side module
- Required setting of $LS_{A/B}$ pressure relief valves, if accessory module PVBR is ordered.

Order Form

Reordering

The space at the top right-hand corner of the form is for Sauer-Danfoss to fill in. The code number for the whole of the specified valve group (PVG No.) is entered here. In the event of a repeat order all you have to do is enter the number Sauer-Danfoss has given on the initial confirmation of order.

If PVG 120 is to be used with phosphate-esters this must be stated on the order form (see also page 38, “Non-flammable fluids”).

PVG 120
Specification Sheet

Subsidiary / Dealer	PVG No.
Customer	Customer No.
Application	Revision No.

Function	A-Port			B-Port	
		0 155G p =	155G bar		
	a 155G	**1** 155G	155G **e**	155G	**c**
	b 155G	**f** 155G	LS_{AB} bar	155G	**b**
	a 155G	**2** 155G	155G **e**	155G	**c**
	b 155G	**f** 155G	LS_{AB} bar	155G	**b**
	a 155G	**3** 155G	155G **e**	155G	**c**
	b 155G	**f** 155G	LS_{AB} bar	155G	**b**
	a 155G	**4** 155G	155G **e**	155G	**c**
	b 155G	**f** 155G	LS_{AB} bar	155G	**b**
	a 155G	**5** 155G	155G **e**	155G	**c**
	b 155G	**f** 155G	LS_{AB} bar	155G	**b**
	a 155G	**6** 155G	155G **e**	155G	**c**
	b 155G	**f** 155G	LS_{AB} bar	155G	**b**
	a 155G	**7** 155G	155G **e**	155G	**c**
	b 155G	**f** 155G	LS_{AB} bar	155G	**b**
	a 155G	**8** 155G	155G **e**	155G	**c**
	b 155G	**f** 155G	LS_{AB} bar	155G	**b**
Remarks		**9** 155G			
		10 155G			
		11 155G			

Filled in by	Date

991L1868 ver. 03.2002

Module Selection Chart

PVB, high basic module

	SAE flange	O-ring Boss	Metric flange	Weight kg [lb]
Facilities for shock valves AB	155G6007	155G6006	155G6005	10.2 [22.5]

PVB, low basic module

	SAE flange	O-ring Boss	Metric flange	Weight kg [lb]
No facilities for shock valves AB	155G6016	155G6015	155G6014	8.9 [19.6]

Accessory modules for PVB

		Weight kg [lb]
Plug, PVBP	155G6081	0.4 [0.9]
LSA/B press. relief valve, PVBR	155G6080	0.4 [0.9]
External LS connection, PVBC	155G6082	0.4 [0.9]
Module for oil flow > 180 l/min [47.6 US gal/min], PVBU	155G6035	0.4 [0.9]

PVBS, mechanical actuation

Oil flow l/min [US gal] / Symbol		A 65 [17.2]	B 95 [25.1]	C 130 [34.3]	D 180 [47.6]
		155G6452	155G6454	155G6456	155G6458
			155G6464	155G6466	155G6468
				155G6476	155G6478
Weight	kg [lb]	0.35 [0.8]	0.35 [0.8]	0.35 [0.8]	0.35 [0.8]

PVM, mechanical actuation

PVM + PVMD or PVM + PVE	155G3040 155G3041	22.5° 37.5°
PVM + PVH	155G3050 155G3051	22.5° 37.5°
Weight	kg [lb]	0.5 [1.1]

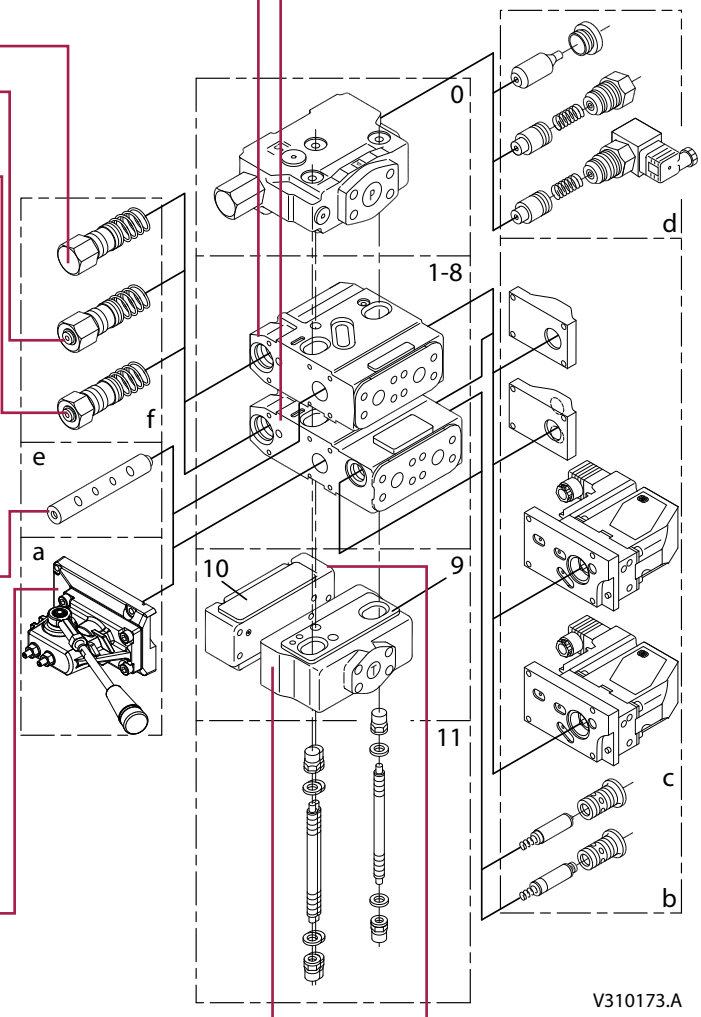

PVT, tank side module

	SAE flange	O-ring Boss	Metric flange	Weight kg [lb]
Upper part excl. LX connection	155G7022	155G7021	155G7020	4.6 [10.1]
Upper part incl. LX connection	155G7025	155G7024	155G7023	4.6 [10.1]
Lower part incl. pilot oil supply PVE for	155G7042		155G7040	4.4 [9.7]
Lower part excl. pilot oil supply for PVE	155G7062		155G7060	4.4 [9.7]
Lower part incl. pilot oil supply for PVH	155G7044		155G7043	4.4 [9.7]

Module Selection Chart

PVP, pump side module

		O-ring Boss	SAE flange	Metric flange	Weight kg [lb]
Open centre	Excl. PVPD, PVPH, PVPE	155G5023	155G5037	155G5021	10.0 [22.1]
	For PVB-oil flow > 180 l/min [47.6 US gal/min] Excl. PVPD, PVPH, PVPE	155G5028	155G5029	155G5027	10.0 [22.1]
Closed centre	Incl. pressure relief valve and plug PVPD	155G5022	155G5038	155G5020	10.2 [22.5]
	Excl. pressure relief valve	155G5031	155G5032	155G5030	11.0 [24.3]

Accessory modules for open centre PVP

			Weight kg [lb]
Plug, PVPD		155G5041	0.4 [0.9]
Hydraulic relief valve, PVH		155G5061	0.5 [1.1]
Electrical relief valve, PVPE	12 V	155G5052	0.7 [1.5]
	24 V	155G5054	0.7 [1.5]

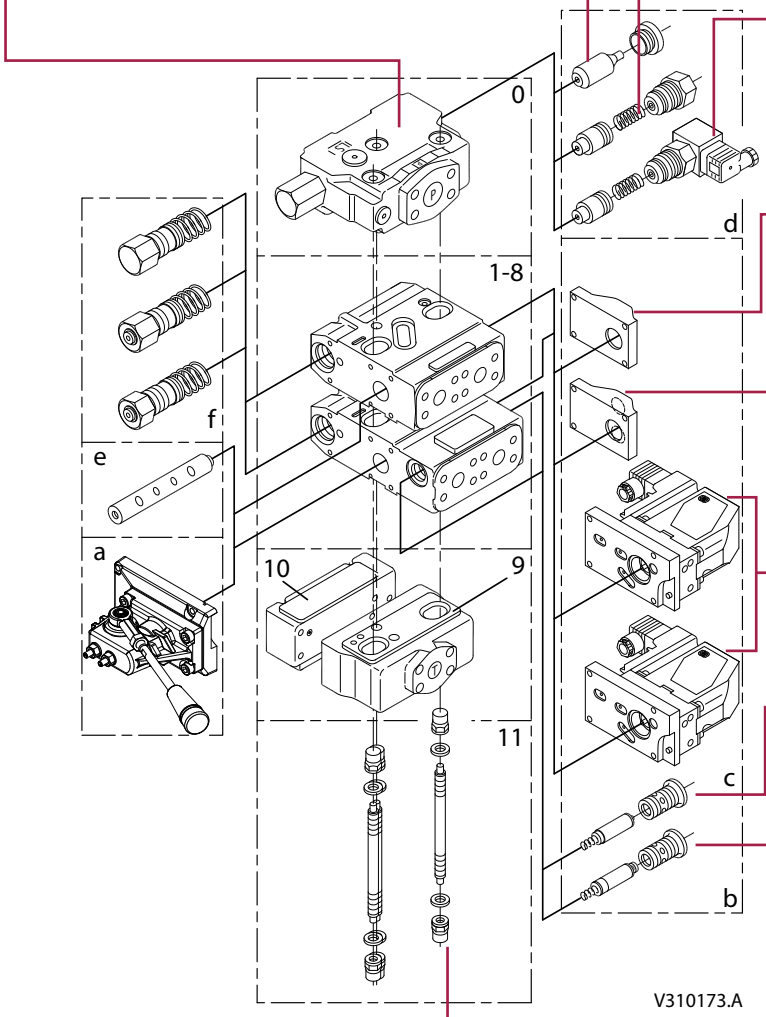

PVMD, cover for PVM

	Weight kg [lb]
155G4061	0.3 [0.7]

PVH, cover for PVRHH

		Weight kg [lb]
1/2 in - 20 UNF	155G4021	0.4 [0.9]
G 1/4	155G4022	0.4 [0.9]

Electrical actuation PVE

Connector	PVEH 11 - 32 V Fault monitoring		PVEO	
	Active	Passive	12 V	24 V
Hirschmann	155G4092	155G4093	155G4272	155G4274
AMP	155G4094	155G4095	155G4282	155G4284
Weight kg	1.25	1.25	1.0	1.0
Weight [lb]	[2.76]	[2.76]	[2.2]	[2.2]

PVLA suction valve A/B

	Weight kg [lb]
155G1065	0.2 [0.4]

PVLP, shock and suction valve A/B

Pressure setting		
bar	[psi]	
50	725	155G0050
75	1100	155G0075
100	1450	155G0100
125	1800	155G0125
150	2200	155G0150
175	2550	155G0175
200	2900	155G0200
225	3250	155G0225
250	3650	155G0250
275	4000	155G0275
300	4350	155G0300
325	4700	155G0325
350	5100	155G0350
375	5400	155G0375
400	5800	155G0400
Weight kg [lb]		0.175 [0.386]

PVAS, assembly kit

PVB's		1	2	3	4	5	6	7	8
		155G8031	155G8032	155G8033	155G8034	155G8035	155G8036	155G8037	155G8038
Weight	kg	0.8	1.0	1.1	1.2	1.4	1.7	1.9	2.1
	[lb]	[1.8]	[2.2]	[2.4]	[2.6]	[3.1]	[3.7]	[4.2]	[4.6]

SAUER DANFOSS

Products we offer:

- Bent Axis Motors
- Closed Circuit Axial Piston Pumps and Motors
- Displays
- Electrohydraulic Power Steering
- Electrohydraulics
- Hydraulic Power Steering
- Integrated Systems
- Joysticks and Control Handles
- Microcontrollers and Software
- Open Circuit Axial Piston Pumps
- Orbital Motors
- PLUS+1™ GUIDE
- Proportional Valves
- Sensors
- Steering
- Transit Mixer Drives

Members of the Sauer-Danfoss Group:

Comatrol
www.comatrol.com

Schwarzmüller-Inverter
www.schwarzmueller-inverter.com

Turolla
www.turollaocg.com

Hydro-Gear
www.hydro-gear.com

Sauer-Danfoss-Daikin
www.sauer-danfoss-daikin.com

520L0356 • Rev IA • Sep 2011

Sauer-Danfoss is a global manufacturer and supplier of high-quality hydraulic and electronic components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market. Building on our extensive applications expertise, we work closely with our customers to ensure exceptional performance for a broad range of off-highway vehicles.

We help OEMs around the world speed up system development, reduce costs and bring vehicles to market faster.
Sauer-Danfoss – Your Strongest Partner in Mobile Hydraulics.

Go to www.sauer-danfoss.com for further product information.

Wherever off-highway vehicles are at work, so is Sauer-Danfoss.

We offer expert worldwide support for our customers, ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide comprehensive global service for all of our components.

Please contact the Sauer-Danfoss representative nearest you.

Local address:

Sauer-Danfoss (US) Company
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000
Fax: +1 515 239 6618

Sauer-Danfoss ApS
DK-6430 Nordborg, Denmark
Phone: +45 7488 4444
Fax: +45 7488 4400

Sauer-Danfoss GmbH & Co. OHG
Postfach 2460, D-24531 Neumünster
Krokamp 35, D-24539 Neumünster, Germany
Phone: +49 4321 871 0
Fax: +49 4321 871 122

Sauer-Danfoss-Daikin LTD.
Shin-Osaka TERASAKI 3rd Bldg. 6F
1-5-28 Nishimiyahara, Yodogawa-ku
Osaka 532-0004, Japan
Phone: +81 6 6395 6066
Fax: +81 6 6395 8585

www.sauer-danfoss.com